





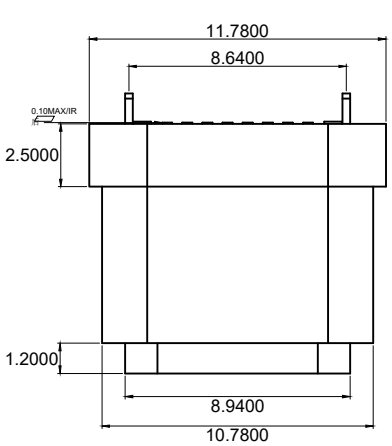

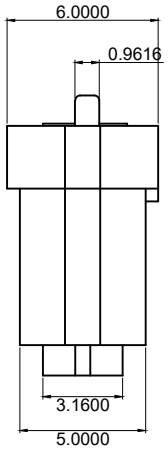

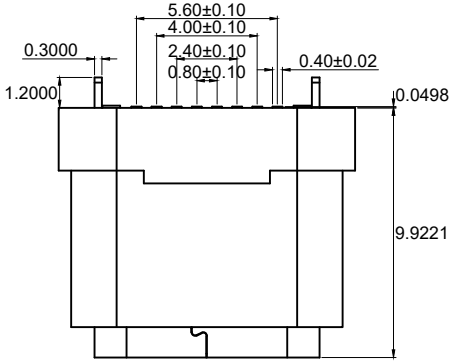

NOTE:
1. MATERIAL:
   1.1 INSULATOR: HIGH TEMPERATURE PLASTIC UL 94 V-0; Black Color
   1.2 CONTACT: C7025(T=0.20mm)
   1.3 SHELL:STAINLESS STEEL(T=0.20mm)
   1.4 MID PLATE:STAINLESS STEEL(T=0.15mm)
2. ELECTRICAL CHARACTERISTICS:
   2.1 CONTACT RESISTANCE: 40mΩ Max FOR INITIAL. 10mΩ CHANGE AFTER TEST. MEASURE AT 20mV, 100mA.
   2.3 DIELECTRIC WITHSTANDING VOLTAGE: 100V AC R.M.S.
   2.4 INSULATION RESISTANCE 100MΩ Min
   2.5 OPERATING TEMPERATURE: -40° C ～ 85° C
3 MECHANICAL CHARACTERISTICS:
   3.1 MATING FORCE: 5~20 N.
   3.2 UNMATED FORCE: 8~20N INITIAL TEST; 6~20N DURABILITY AFTER TEST
   3.3 DURABILITY: 10,000 CYCLES
4. PLATING
   4.1 TERMINAL CONTACT: Au 3u'' PLATING ON CANTACT AREA; TIN 50u'' Min TING ON SOLDER TAIL,SN 80u'' Min UNDERPLATING OVERALL
   4.2 SHELL: 50u" Min. NICKEL ALL OVER,
   4.3 MID PLATE: 50u" Min. NICKEL ALL OVER,

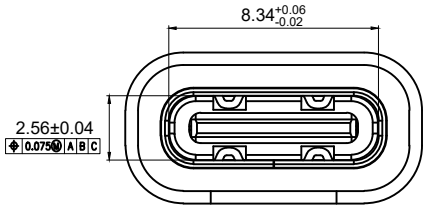

NO.	DESCRIPTION	MATERIAL	REMARKS	QTY	盐雾	PACKAGING
5	CAP	LCP 6007AS UL94V-0	BLACK	1PCS	24H	Reel
4	SHELL	SUS304 T=0.30mm	Ni 50u" Min Plated	1PCS		
3	LATCH	SUS301-H T=0.15mm	Ni 50u" Min Plated	1PCS		
2	CONTACT	C7025 T=0.20mm	Au 3u" PLATING ON CANTACT AREA; TIN 50u" Min TING ON SOLDER TAIL,SN 80u" Min UNDERPLATING OVERALL	1SET		
1	HOUSING	LCP UL94V-0	LCP BLACK UL94V-0	1PCS		

MARK	DESCRIPTION	DATE	REVISED	APPROVED
△X				
△X				
△X				

REVISIONS


UNSPECIFIED TOLERANCES	
ANGLAR	±5°
L≤ 4	±0.2
4<L≤ 16	±0.3
16<L≤ 63	±0.4
L> 63	±0.5


www.hiemi.cn


HIEMI TECHNOLOGY CO., LTD


DSND		SCALE: N/A	USB TYPE CF 8PIN直立式10.0防水IPX8
DWN		VIEW:	PART NO.: 82208-002
CHKD		UNIT: mm/in	DWG NO.:
APPD		SIZE: A4	


WEIGHT	SHEET	REVISION
	1/1	A0










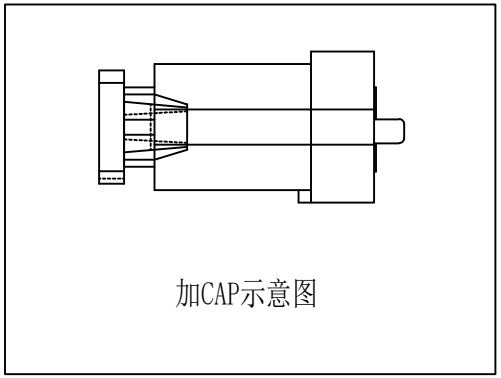

加CAP示意图




					ANGLAR	±5°
△X					L≤ 4	±0.2
△X					4<L≤ 16	±0.3
△X					16<L≤ 63	±0.4
MARK	DESCRIPTION	DATE	REVISED	APPROVED	L> 63	±0.5
REVISIONS					UNSPECIFIED TOLERANCES	

www.hiemi.cn


HIEMI TECHNOLOGY CO., LTD


DSND		SCALE: N/A	USB TYPE CF 8PIN直立式10.0防水IPX8
DWN		VIEW:	PART NO.: 82208-002
CHKD		UNIT: mm/in	DWG NO.:
APPD		SIZE: A4	

WEIGHT	SHEET	REVISION
	1/1	A0



加防水圈示意图

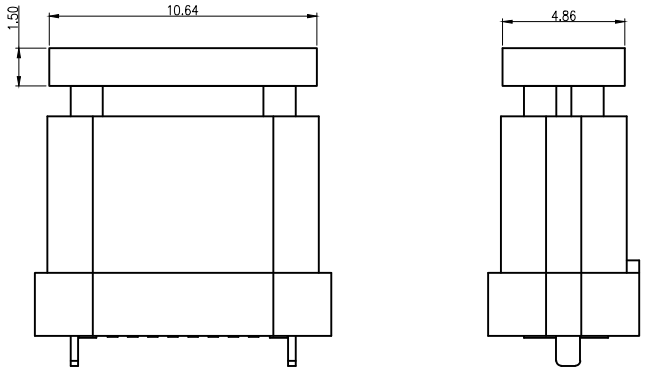

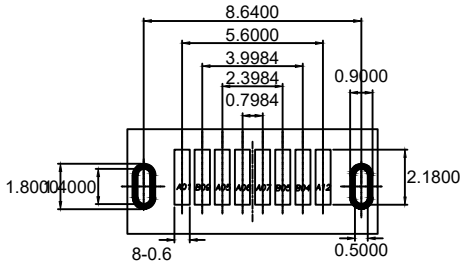

RECOMMENDED P.C.B. LAYOUT

TOLERANCE UNSPECIFIED ±0.05mm


					ANGLAR	±5°
△X					L≤ 4	±0.2
△X					4<L≤ 16	±0.3
△X					16<L≤ 63	±0.4
MARK	DESCRIPTION	DATE	REVISED	APPROVED	L> 63	±0.5
REVISIONS					UNSPECIFIED TOLERANCES	


www.hiemi.cn


HIEMI TECHNOLOGY CO., LTD

DSND		SCALE: N/A	USB TYPE CF 8PIN直立式10.0防水IPX8
DWN		VIEW:	PART NO.:
CHKD		UNIT: mm/in	DWG NO.:
APPD		SIZE: A4	

WEIGHT	SHEET	REVISION
	1/1	A0

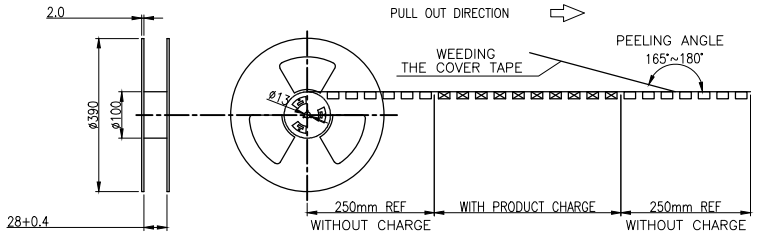

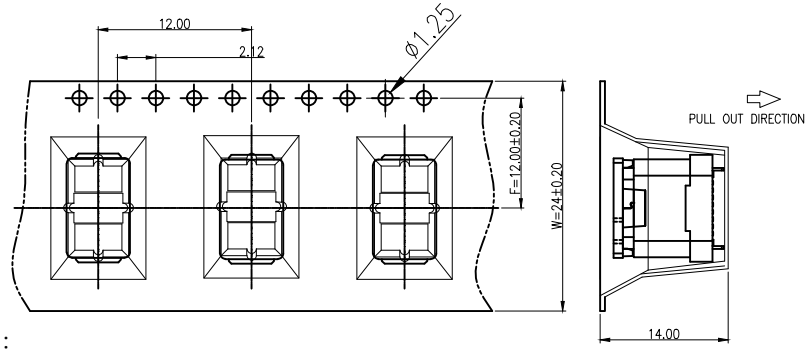

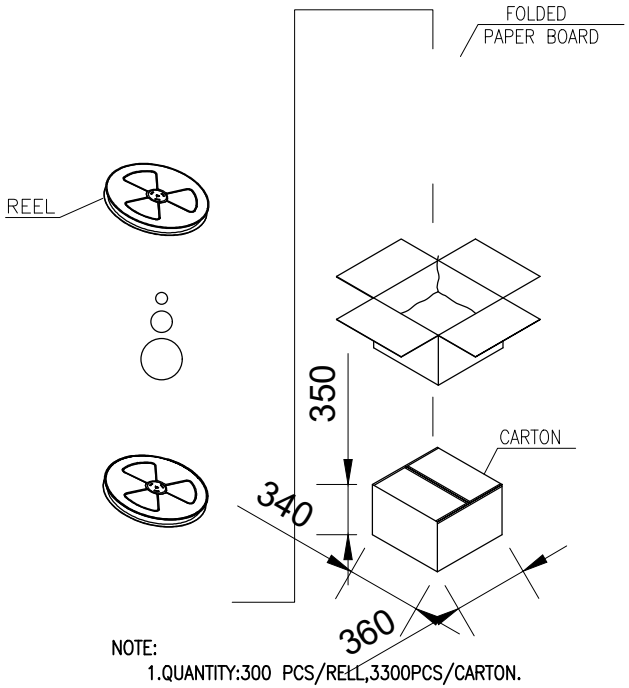

NOTE:
1.QUANTITY:300 PCS/REEL,3300PCS/CARTON.

注意:
1.材料:
纸箱:纤维板，瓦楞，双层壁。
胶带:聚苯乙烯，耐热温度:120℃，白。
卷筒:聚苯乙烯，耐热温度:70℃，蓝色。
包装:聚乙烯，耐热温度:100℃。
2.剥离强度:0.1 ~ 1.3 N(10 ~ 130克)
3.脱皮速度:300mm /min。
4.每个袋子都应包括干燥剂*2。
5.外箱上贴号物料标签及RHOS标签
6.同一产品只能装同一纸箱，不允其它产品;
7.包装后，产品铆合面朝外；柱子朝内;

300	11	3300 PCS
PCS/卷	卷/箱	箱

MARK	DESCRIPTION	DATE	REVISED	APPROVED
△X				
△X				
△X				

REVISIONS

UNSPECIFIED TOLERANCES	
ANGLAR	±5°
L≤ 4	±0.2
4<L≤ 16	±0.3
16<L≤ 63	±0.4
L> 63	±0.5

HIEMI TECHNOLOGY CO., LTD

DSND		SCALE: N/A	
DWN		VIEW:	PART NO.: 82208-002
CHKD		UNIT: mm/in	DWG NO.:
APPD		SIZE: A4	

WEIGHT	SHEET	REVISION
	1/1	A0

www.hiemi.cn