



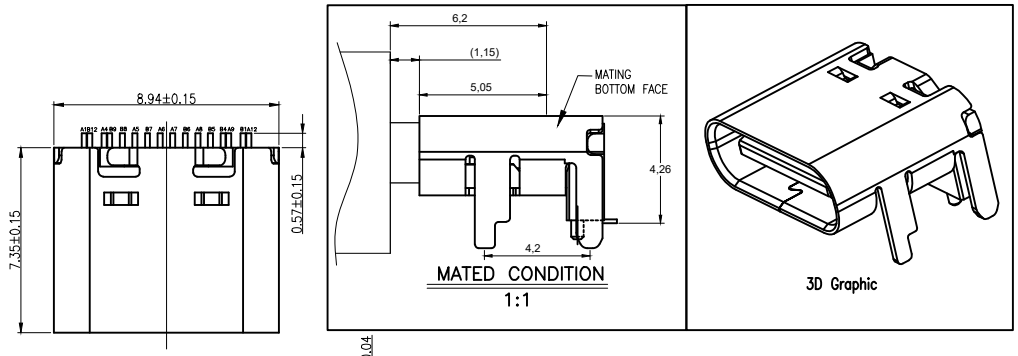


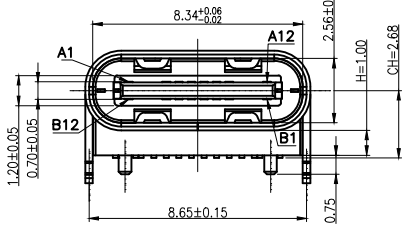

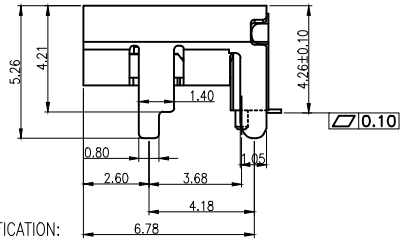

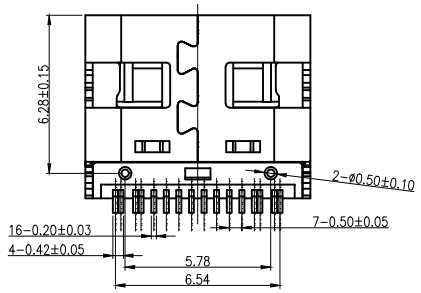

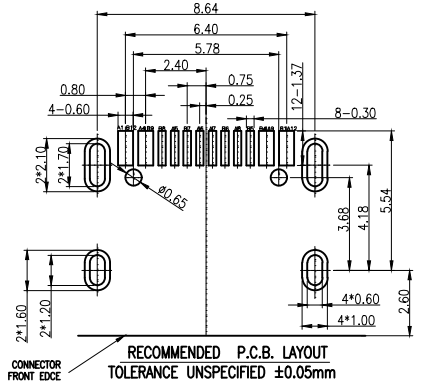

NOTES:
SPECIFICATION:

1. CURRENT RATING: 5A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: −30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. LNSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES

料号	规格
82216-033	橙LCP C7025接触区镀金1U锡脚雾锡
82216-062	白LCP C7025接触区镀金1U锡脚雾锡
82216-101	黑LCP C7025接触区镀金1U锡脚雾锡
82216-102	白LCP C7025接触区镀金1U锡脚雾锡
82216-105	橙LCP C7025接触区镀金1U锡脚雾锡
82216-107	浅蓝LCP C7025接触区镀金1U锡脚雾锡
82216-108	深蓝LCP C7025接触区镀金1U锡脚雾锡
82216-109	浅绿LCP C7025接触区镀金1U锡脚雾锡
82216-114	蓝LCP C7025接触区镀金1U锡脚雾锡

加宽脚1.4

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
6	SHELL	STAINLESS STEEL SUS304 T=0.3	NI 50U"	1PCS
5	SHIELDING PLATE	STAINLESS STEEL SUS301 T=0.12	清洗	1PCS
4	MD	HIGH TEMPERATURE PLASTIC	黑色	1PCS
3	CONTACT	COPPER ALLOY C7025TM03 T=0.15	镀底60U 金1U" 雾锡100U"	1SET
2	CONTACT	COPPER ALLOY C7025TM03 T=0.15	镀底60U 金1U" 雾锡100U"	1SET
1	HOUSING	HIGH TEMPERATURE PLASTIC	黑色	1PCS

MARK	DESCRIPTION	DATE	REVISED	APPROVED
△X				
△X				
△X				

REVISIONS

ANGLAR	±5°
L≤ 4	±0.2
4<L≤ 16	±0.3
16<L≤ 63	±0.4
L> 63	±0.5

UNSPECIFIED TOLERANCES


www.hiemi.cn


HIEMI TECHNOLOGY CO., LTD

DSND		SCALE: N/A
DWN		VIEW:
CHKD		UNIT: mm/in
APPD		SIZE: A4


PART NO.:
TYPE C母座16PIN板上SMT垫高1.0型 CH=2.68
DWG NO.:

WEIGHT	SHEET	REVISION
	1/1	A0

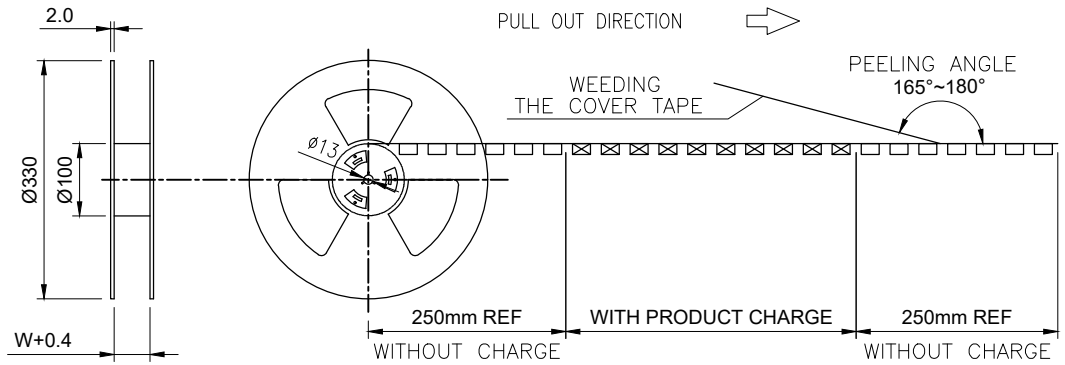

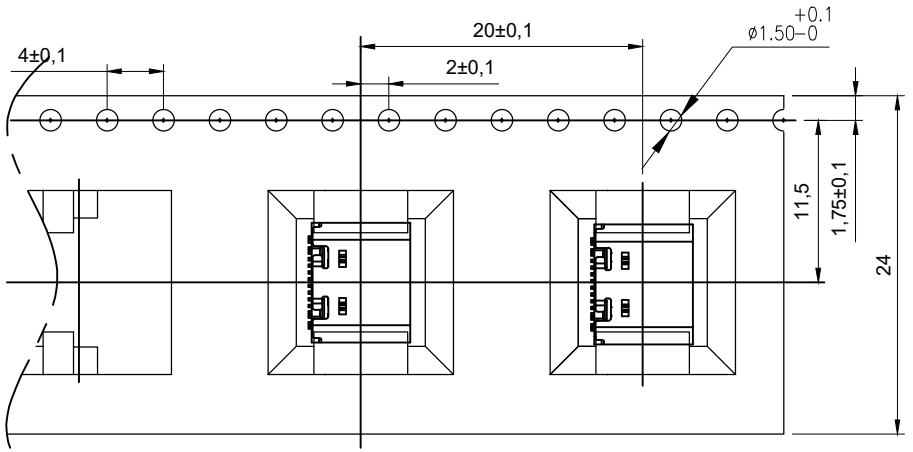

PULL OUT DIRECTION

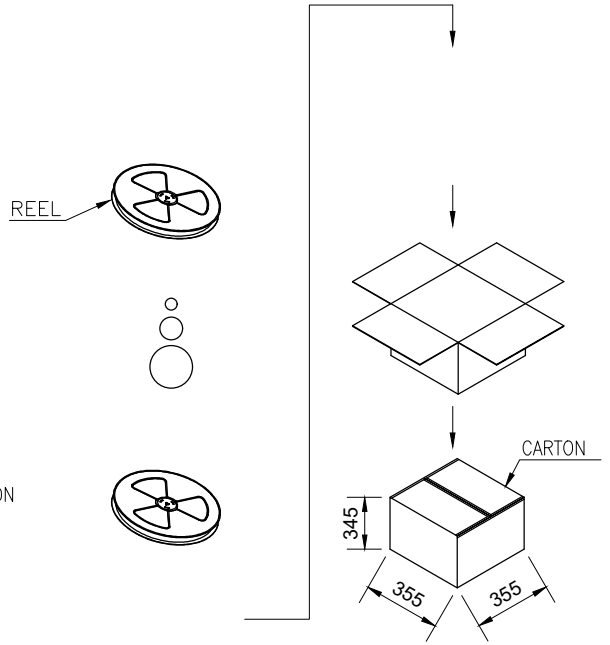

NOTE:
1.QUANTITY:1000 PCS/RELL,5000PCS/CARTON.

MARK	DESCRIPTION	DATE	REVISED	APPROVED
△X				
△X				
△X				

REVISIONS

UNSPECIFIED TOLERANCES	
ANGLAR	±5°
L≤ 4	±0.2
4<L≤ 16	±0.3
16<L≤ 63	±0.4
L> 63	±0.5

www.hiemi.cn

HIEMI TECHNOLOGY CO., LTD

DSND		SCALE: N/A	
DWN		VIEW:	PART NO.: TYPE C母座16PIN板上SMT垫高型
CHKD		UNIT: mm/in	DWG NO.:
APPD		SIZE: A4	

WEIGHT	SHEET	REVISION
	1/1	A0