


RoHS

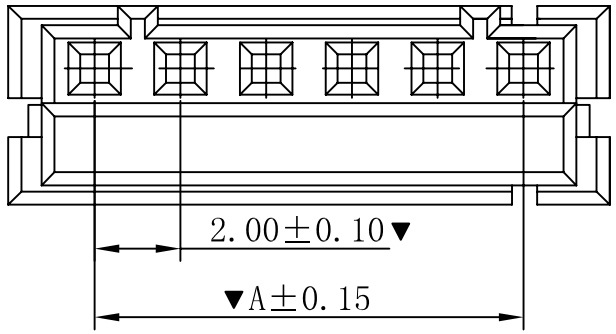

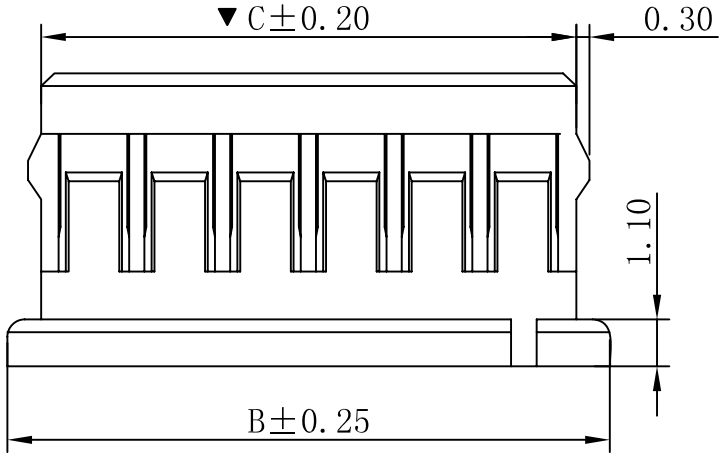

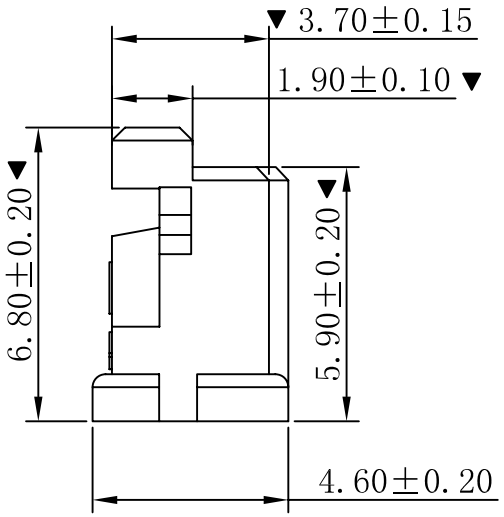

■SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 3A, AC, DC
- Withstanding Voltage: 800V AC/minute
- Insulation resistance:1000MΩ min
- Temperature range: -25° C~+85° C
- Contact resistance: 20mΩ max

■HOUSING

- Part No.: H2006-NP
- Poles : 02-15P
- Housing Material: Nylon66 UL94V-0
- The Dimension Marked "▼" Must Be Recorded

PART NO.	Dimensions (mm)		
	A	B	C
02	2.00	6.00	4.45
03	4.00	8.00	6.45
04	6.00	10.00	8.45
05	8.00	12.00	10.45
06	10.00	14.00	12.45
07	12.00	16.00	14.45
08	14.00	18.00	16.45
09	16.00	20.00	18.45
10	18.00	22.00	20.45
11	20.00	24.00	22.45
12	22.00	26.00	24.45
13	24.00	28.00	26.45
14	26.00	30.00	28.45
15	28.00	32.00	30.45

MARK	DESCRIPTION	DATE	REVISED	APPROVED
ΔX				
ΔX				
ΔX				

REVISIONS

UNSPECIFIED TOLERANCES	
ANGLAR	±5°
L≤ 4	±0.2
4<L≤ 16	±0.3
16<L≤ 63	±0.4
L> 63	±0.5

www.hiemi.cn

HIEMI TECHNOLOGY CO., LTD

DSND		SCALE: N/A
DWN		VIEW:
CHKD		UNIT: mm/in
APPD		SIZE: A4


DF3 2.00mm Housing Connector Series


PART NO.: H2006-NP


DWG NO.:

WEIGHT	SHEET	REVISION
	1/1	A0


RoHS

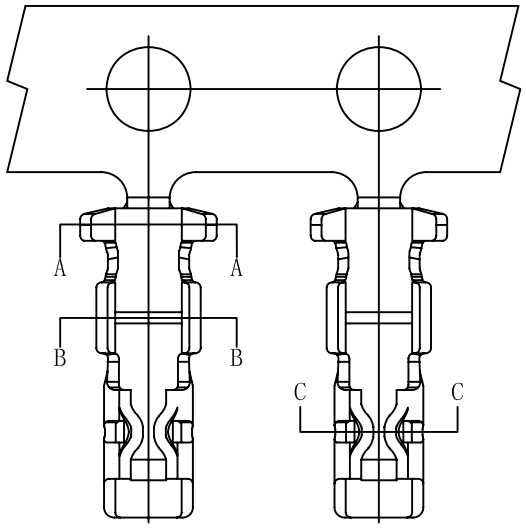

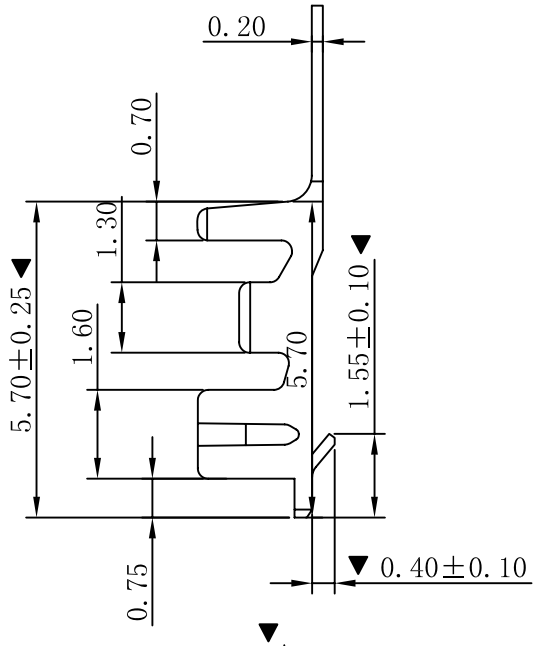


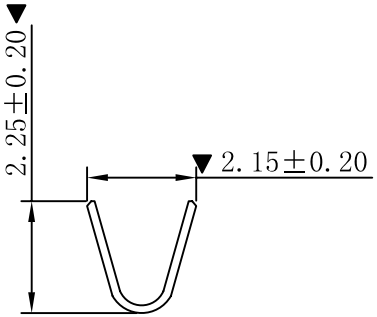

SEC A-A



SEC B-B



SEC C-C

■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 3A, AC, DC
- Withstanding Voltage: 800V AC/minute
- Insulation resistance:1000MΩ min
- Temperature range: -25° C~+85° C
- Contact resistance: 20mΩ max

■ TERMINAL

- Part No.: T2006PT
- Applicable wire: AWG#22-#28
- Material: Phosphor Bronze
- Finish: Tin Plated
- The Dimension Marked "▼" Must Be Recorded

MARK	DESCRIPTION	DATE	REVISED	APPROVED
ΔX				
ΔX				
ΔX				

REVISIONS

UNSPECIFIED TOLERANCES	
ANGLAR	±5°
L≤ 4	±0.2
4<L≤ 16	±0.3
16<L≤ 63	±0.4
L> 63	±0.5

www.hiemi.cn

HIEMI TECHNOLOGY CO., LTD

DSND		SCALE: N/A
DWN		VIEW:
CHKD		UNIT: mm/in
APPD		SIZE: A4

DF3 2.00mm Terminal Connector Series

PART NO.: T2006PT

DWG NO.:

WEIGHT	SHEET	REVISION
	1/1	A0