

RoHS

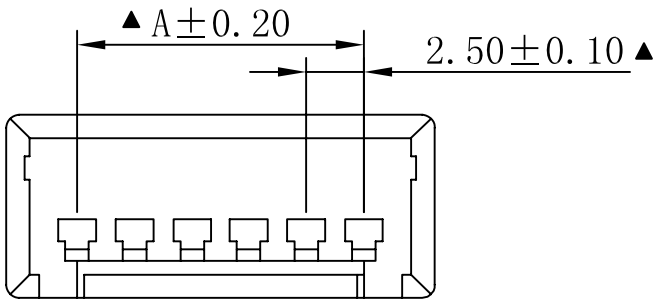

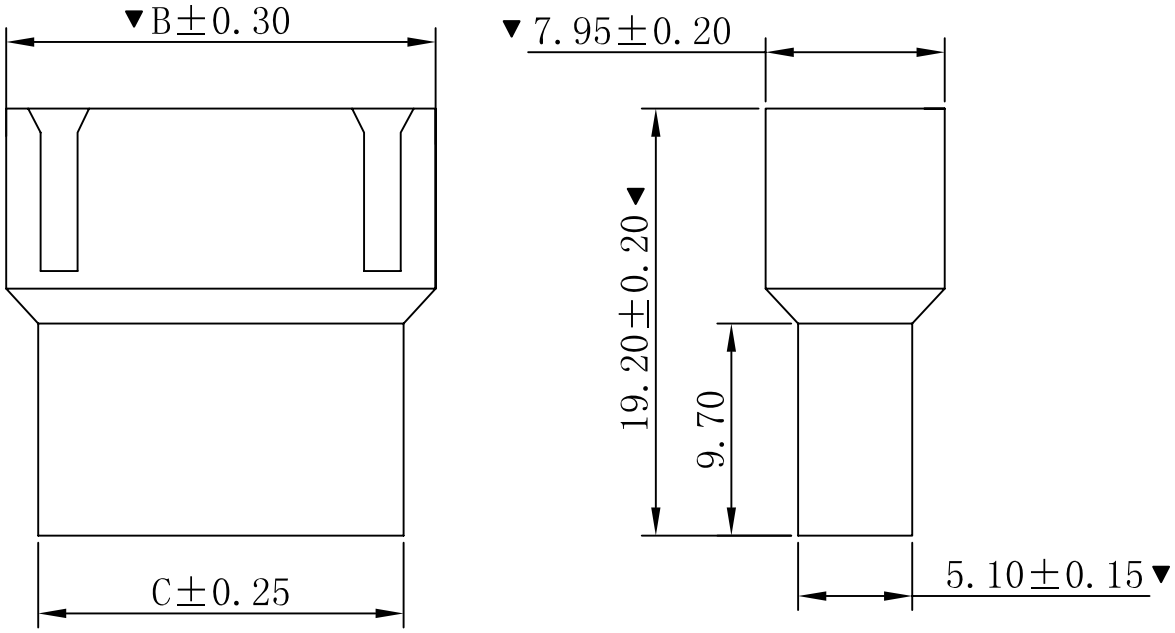

■SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 3A, AC, DC
- Withstanding Voltage: 1000V AC/minute
- Insulation resistance:500MΩ min
- Temperature range: -25° C~+85° C
- Contact resistance: 20mΩ max

■HOUSING

- Part No.: H2517-NP(J)
- Poles : 02-12P
- Housing Material: Nylon66 UL94V-0
- The Dimension Marked "▼" Must Be Recorded

PART NO.	Dimensions (mm)		
	A	B	C
02	2.50	8.60	5.80
03	5.00	11.10	8.30
04	7.50	13.60	10.80
05	10.00	16.10	13.30
06	12.50	18.60	15.80
07	15.00	21.10	18.30
08	17.50	23.60	20.80
09	20.00	26.10	23.30
10	22.50	28.60	25.80
11	25.00	31.10	28.30
12	27.50	33.60	30.80

MARK	DESCRIPTION	DATE	REVISED	APPROVED
ΔX				
ΔX				
ΔX				

REVISIONS

UNSPECIFIED TOLERANCES	
ANGLAR	±5°
L≤ 4	±0.2
4<L≤ 16	±0.3
16<L≤ 63	±0.4
L> 63	±0.5

www.hiemi.cn

HIEMI TECHNOLOGY CO., LTD

DSND		SCALE: N/A
DWN		VIEW:
CHKD		UNIT: mm/in
APPD		SIZE: A4


2540 2.50mm Housing Connector Series

PART NO.: H2517-NP(J)

DWG NO.:

WEIGHT	SHEET	REVISION
	1/1	A0

RoHS

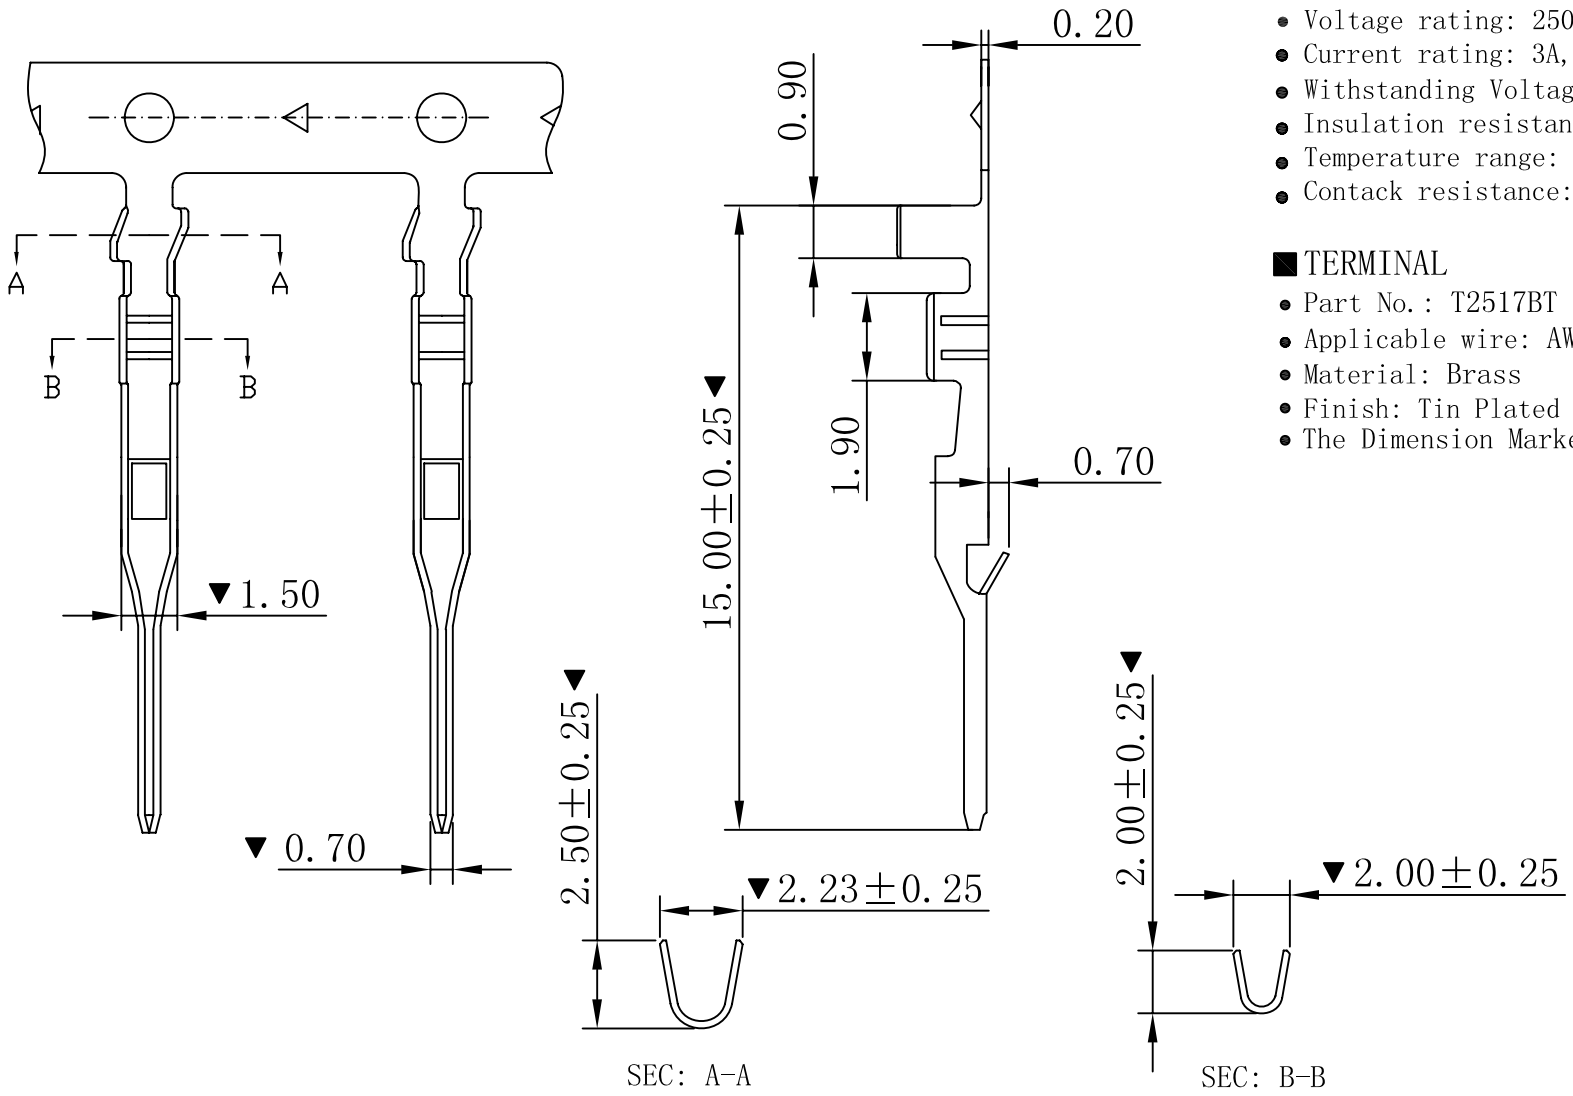

■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 3A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C~+85° C
- Contack resistance: 20mΩ max

■ TERMINAL

- Part No.: T2517BT
- Applicable wire: AWG#22-#28
- Material: Brass
- Finish: Tin Plated
- The Dimension Marked "▼" Must Be Recorded

MARK	DESCRIPTION	DATE	REVISED	APPROVED
ΔX				
ΔX				
ΔX				

REVISIONS

UNSPECIFIED TOLERANCES	
ANGLAR	±5°
L≤ 4	±0.2
4<L≤ 16	±0.3
16<L≤ 63	±0.4
L> 63	±0.5

www.hiemi.cn

HIEMI TECHNOLOGY CO., LTD

DSND		SCALE: N/A
DWN		VIEW:
CHKD		UNIT: mm/in
APPD		SIZE: A4

2540 2.50mm Terminal Connector Series

PART NO.: T2517BT

DWG NO.:

WEIGHT	SHEET	REVISION
	1/1	A0