
RoHS


■ SPECIFICATIONS


- Voltage rating: 600V AC, DC
- Current rating: 7A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance:1000MΩ min
- Temperature range: -25° C~+85° C
- Contact resistance: 20mΩ max


■ HOUSING


- Part No.: H4201-20+4-BK
- Housing Material:Nylon66 UL94V-2 Black
- Mates With: H4202 and W4202 dual row connectors
- Use With: T4202 terminals
- The Dimension Marked "▼" Must Be Recorded



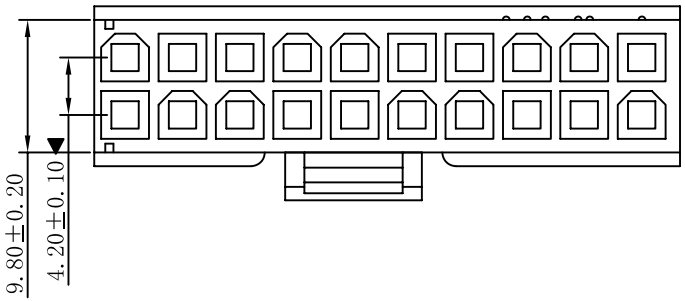

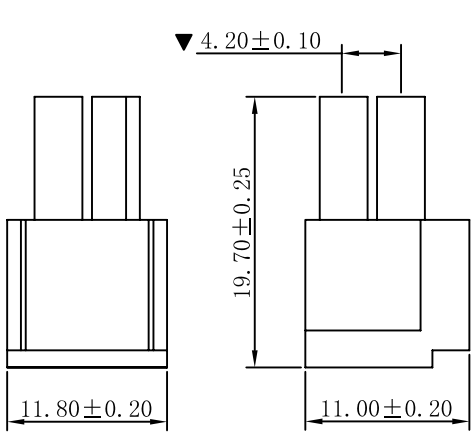

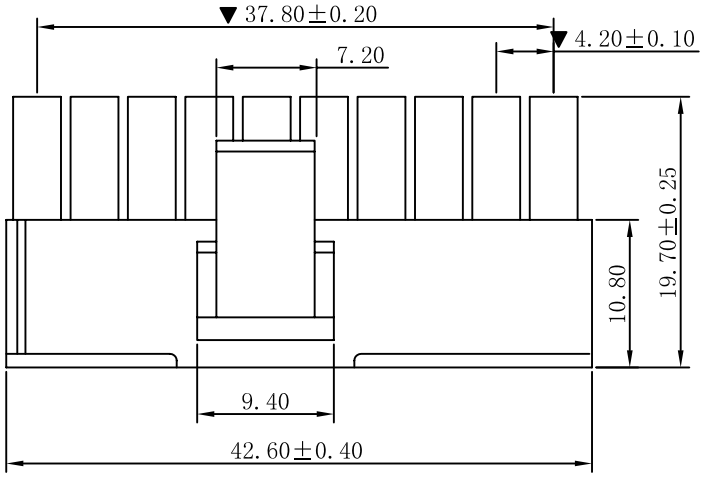

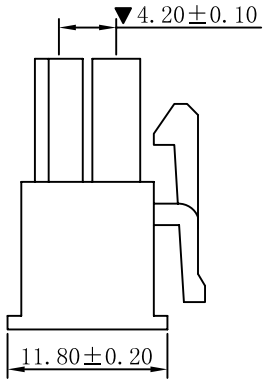

					ANGLAR	±5°
ΔX					L≤ 4	±0.2
ΔX					4<L≤ 16	±0.3
ΔX					16<L≤ 63	±0.4
MARK	DESCRIPTION	DATE	REVISED	APPROVED	L> 63	±0.5
REVISIONS					UNSPECIFIED TOLERANCES	

www.hiemi.cn

HIEMI TECHNOLOGY CO., LTD

DSND		SCALE: N/A	MX4.20mm Male Housing Connector Series
DWN		VIEW:	PART NO.: H4201-20+4-BK
CHKD		UNIT: mm/in	DWG NO.:
APPD		SIZE: A4	

WEIGHT	SHEET	REVISION
	1/1	A0