




RoHS

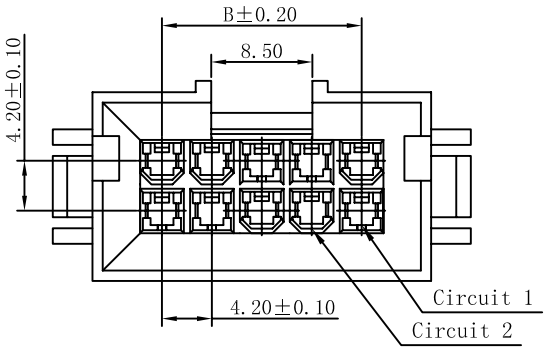



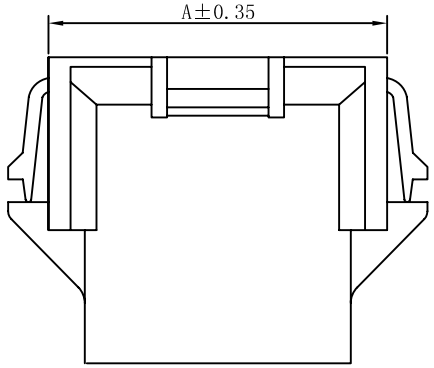

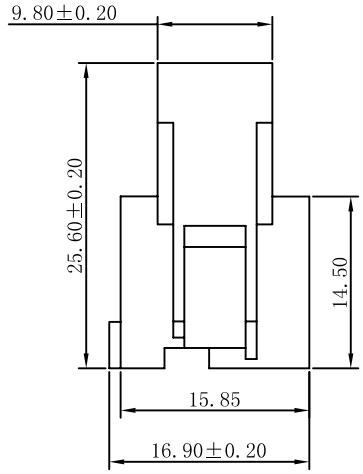

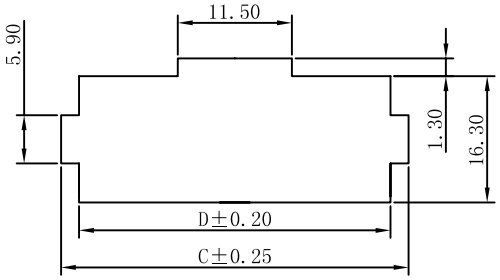

RECOMMENDED PCB CUTOUT
PANEL THICKNESS:1.60

■SPECIFICATIONS

- Voltage rating: 600V AC, DC
- Current rating: 7A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance:1000MΩ min
- Temperature range: -25° C~+85° C
- Contact resistance: 20mΩ max

■HOUSING

- Part No.: H4202L-2xNP-XX
- Poles: 04-36P
- Housing Material:Nylon66 UL94V-2 or UL94V-0
- Mates With: H4201L dual row receptacle
- Use With: T4201 terminals
- The Dimension Marked "▼" Must Be Recorded

H4202L-2xNP-XX
- None:Pa66-V2 Natural
- BK:Pa66-V2 Black
- V0:Pa66-V0 Natural
- V0BK:Pa66-V0 Black

Part No	Dimensions			
	A	B	C	D
2x02	15.80	4.20	19.80	16.30
2x03	20.00	8.40	24.00	20.50
2x04	24.20	12.60	28.20	24.70
2x05	28.40	16.80	32.40	28.90
2x07	36.80	25.20	40.80	37.30
2x09	45.20	33.60	49.20	45.70
2x10	49.40	37.80	53.40	49.90
2x12	57.80	46.20	61.80	58.30

MARK	DESCRIPTION	DATE	REVISED	APPROVED
ΔX				
ΔX				
ΔX				

REVISIONS

UNSPECIFIED TOLERANCES	
ANGLAR	±5°
L≤ 4	±0.2
4<L≤ 16	±0.3
16<L≤ 63	±0.4
L> 63	±0.5

www.hiemi.cn

HIEMI TECHNOLOGY CO., LTD

DSND		SCALE: N/A	MX4.20mm Female Housing Connector Series
DWN		VIEW:	PART NO.: H4202L-2xNP-XX
CHKD		UNIT: mm/in	DWG NO.:
APPD		SIZE: A4	

WEIGHT	SHEET	REVISION
	1/1	A0