

RoHS

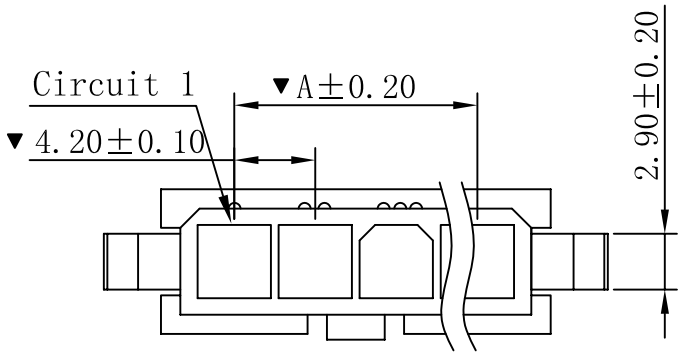





■SPECIFICATIONS


- Voltage rating: 600V AC, DC
- Current rating: 7A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance:1000MΩ min
- Temperature range: -25° C~+85° C
- Contact resistance: 20mΩ max

■HOUSING

- Part No.: H4202-1xNP-XX
- Poles: 02-06P
- Housing Material:Nylon66 UL94V-2 or UL94V-0
- Mates With: H4201 Single row receptacle
- Use With: T4201 terminals
- The Dimension Marked "▼" Must Be Recorded

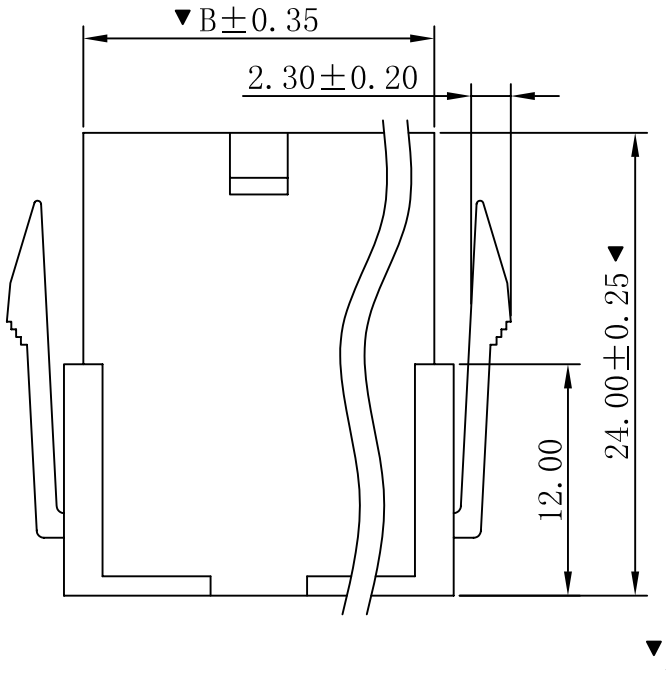

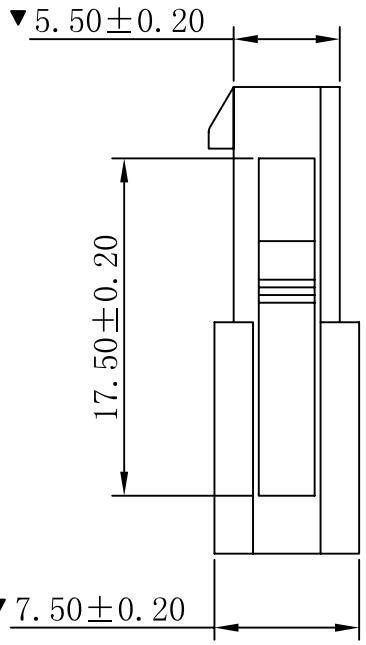

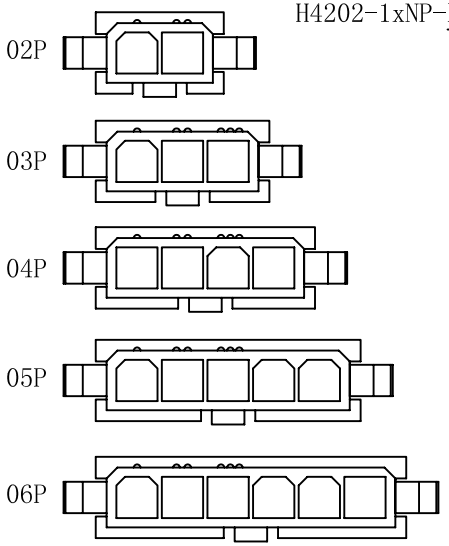

CIRCUIT SIZE LAYOUT

H4202-1xNP-XX

None:Pa66-V2 Natural
BK:Pa66-V2 Black
V0:Pa66-V0 Natural
V0BK:Pa66-V0 Black

Part No	Dimensions (mm)	
	A	B
02	4.20	9.80
03	8.40	14.00
04	12.60	18.20
05	16.80	22.40
06	21.00	26.60

MARK	DESCRIPTION	DATE	REVISED	APPROVED
ΔX				
ΔX				
ΔX				

REVISIONS

UNSPECIFIED TOLERANCES	
ANGLAR	±5°
L≤ 4	±0.2
4<L≤ 16	±0.3
16<L≤ 63	±0.4
L> 63	±0.5

www.hiemi.cn

HIEMI TECHNOLOGY CO., LTD

DSND		SCALE: N/A
DWN		VIEW:
CHKD		UNIT: mm/in
APPD		SIZE: A4

MX4.20mm Female Housing Connector Series

PART NO.: H4202-1xNP-XX

DWG NO.:

WEIGHT	SHEET	REVISION
	1/1	A0