RoHS


F5081GV	180° CAP
F5081GR	90° CAP
F5081T-04-18#	W=0.58 Wire:18#
F5081T-04-20#	W=0.54 Wire:20#-22#


■SPECIFICATIONS


- Voltage rating: 250V AC, DC
- Current rating: 5A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance:1000MΩ min
- Temperature range: -25° C~+85° C
- Contact resistance: 20mΩ max


■HOUSING

- Part No.: F5081T-04P-XX#
- Housing Material:Nylon 66 UL94V-2 or UL94V-
- Pin Material: Brass
- Contact Area Plating: Tin-plated
- The Dimension Marked "▼" Must Be Recorded

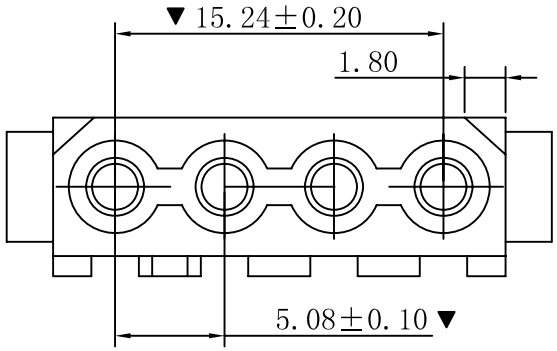


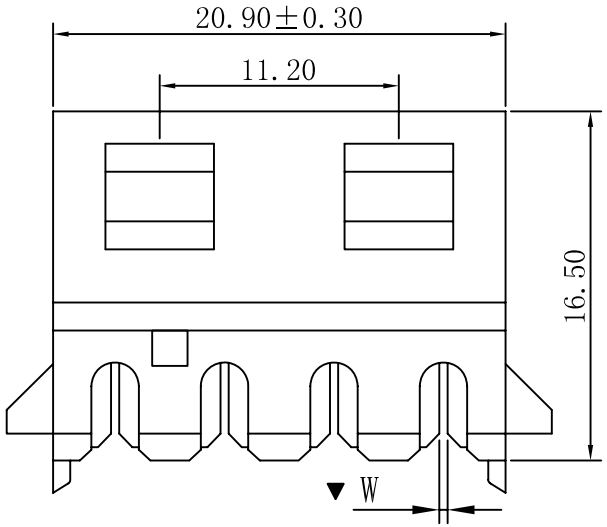

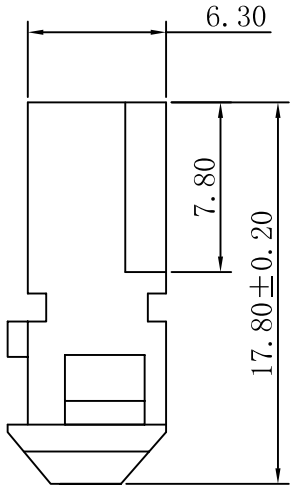

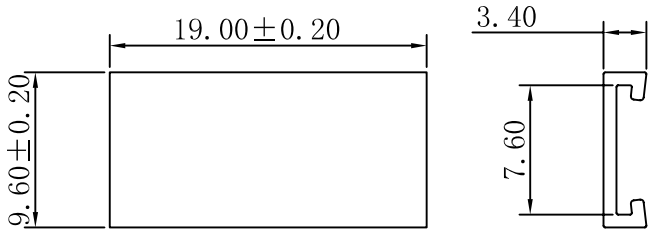

F5081GV

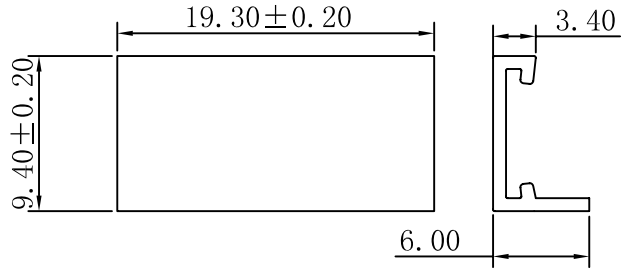

F5081GR

MARK	DESCRIPTION	DATE	REVISED	APPROVED
ΔX				
ΔX				
ΔX				

UNSPECIFIED TOLERANCES	
ANGLAR	±5°
L≤ 4	±0.2
4<L≤ 16	±0.3
16<L≤ 63	±0.4
L> 63	±0.5

REVISIONS

www.hiemi.cn

HIEMI TECHNOLOGY CO., LTD

DSND		SCALE: N/A
DWN		VIEW:
CHKD		UNIT: mm/in
APPD		SIZE: A4

MX5.08mm 刺破式Housing Connector Series

PART NO.: F5081T-04P-XX#

DWG NO.:

WEIGHT	SHEET	REVISION
	1/1	A0