
RoHS

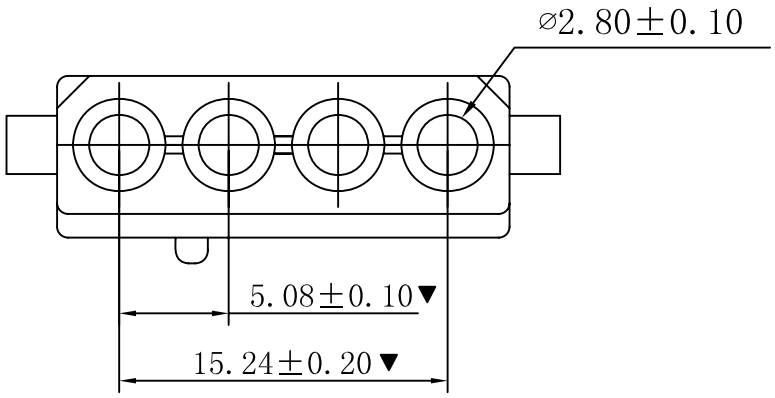



■SPECIFICATIONS


- Voltage rating: 250V AC, DC
- Current rating: 5A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance:1000MΩ min
- Temperature range: -25° C~+85° C
- Contact resistance: 20mΩ max

■HOUSING

- Part No.: H5081-04P(D)
- Housing Material:Nylon 66 UL94V-2
- The Dimension Marked "▼" Must Be Recorded

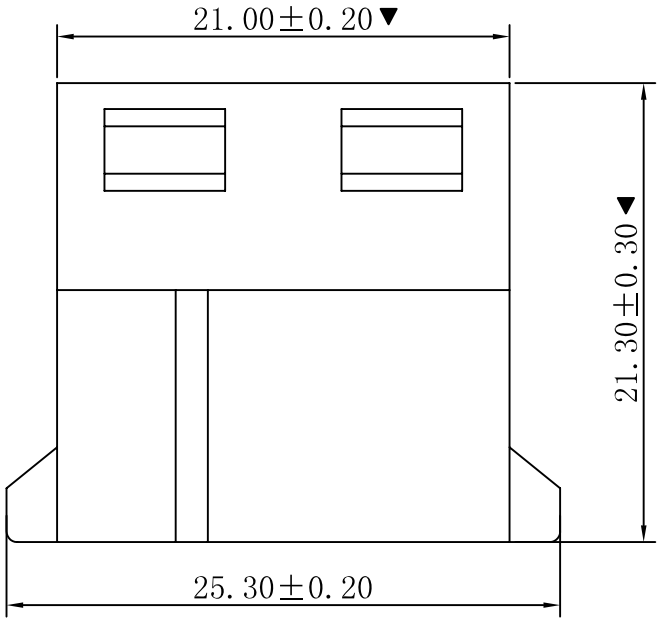

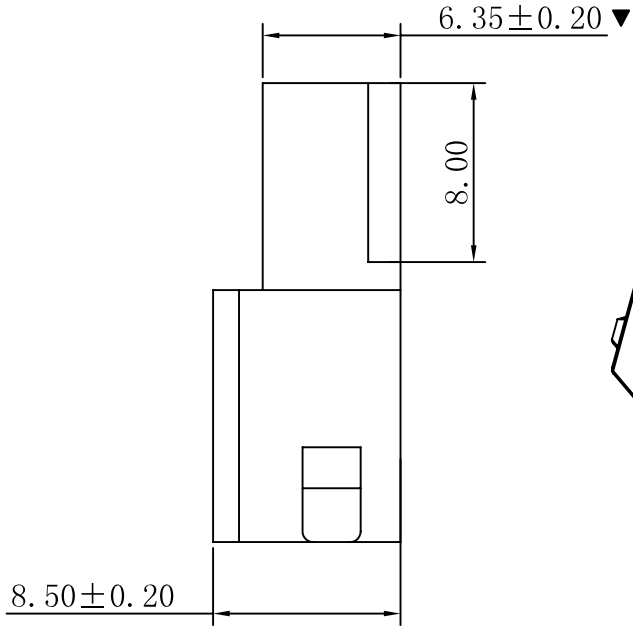

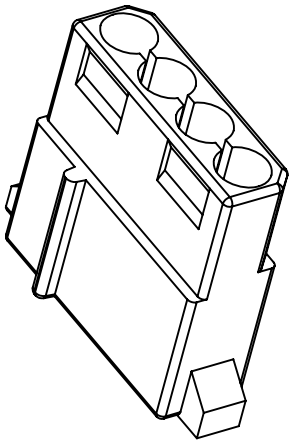

MARK	DESCRIPTION	DATE	REVISED	APPROVED
ΔX				
ΔX				
ΔX				

REVISIONS

UNSPECIFIED TOLERANCES	
ANGLAR	±5°
L≤ 4	±0.2
4<L≤ 16	±0.3
16<L≤ 63	±0.4
L> 63	±0.5

www.hiemi.cn

HIEMI TECHNOLOGY CO., LTD

DSND		SCALE: N/A
DWN		VIEW:
CHKD		UNIT: mm/in
APPD		SIZE: A4


MX5.08mm Male Housing Connector Series


PART NO.: H5081-04P(D)

DWG NO.:

WEIGHT	SHEET	REVISION
	1/1	A0

RoHS

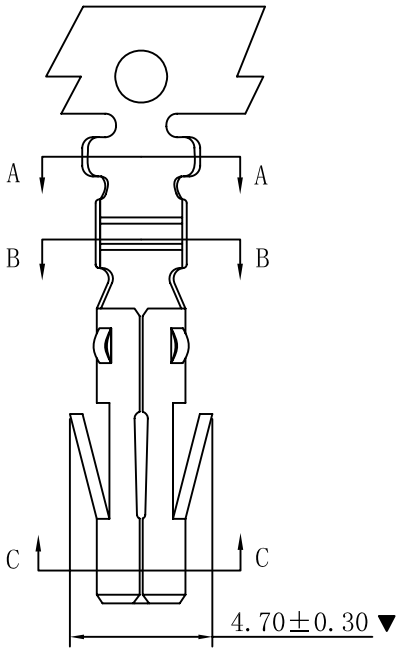

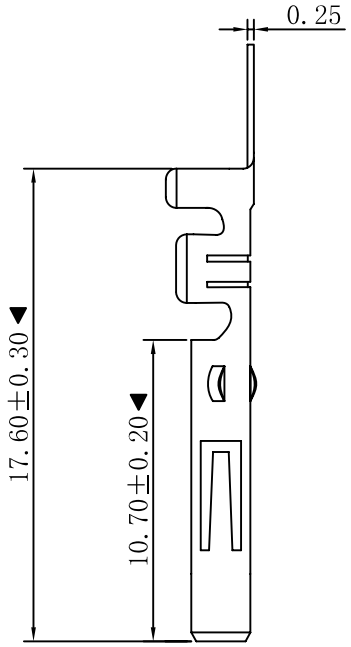


■ SPECIFICATIONS


- Voltage rating: 250V AC, DC
- Current rating: 5A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance:1000MΩ min
- Temperature range: -25° C~+85° C
- Contact resistance: 20mΩ max

■ TERMINAL


- Part No.: T5082BT(D)
- Applicable wire: AWG#18-#20
- Material: Brass
- Finish: Tin Plated
- The Dimension Marked "▼" Must Be Recorded

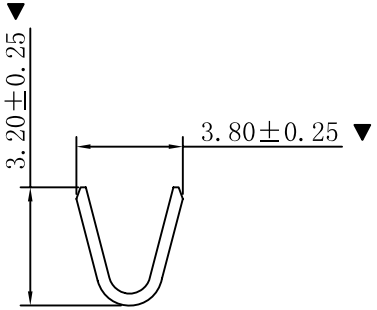

SEC:A-A

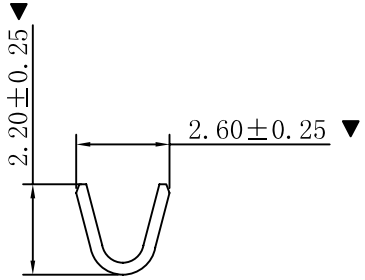

SEC:B-B



SEC:C-C

MARK	DESCRIPTION	DATE	REVISED	APPROVED
ΔX				
ΔX				
ΔX				

REVISIONS

UNSPECIFIED TOLERANCES	
ANGLAR	±5°
L≤ 4	±0.2
4<L≤ 16	±0.3
16<L≤ 63	±0.4
L> 63	±0.5

www.hiemi.cn

HIEMI TECHNOLOGY CO., LTD

DSND		SCALE: N/A
DWN		VIEW:
CHKD		UNIT: mm/in
APPD		SIZE: A4

MX5.08mm Female Terminal Connector Series

PART NO.: T5082BT(D)

DWG NO.:

WEIGHT	SHEET	REVISION
	1/1	A0