
RoHS


SPECIFICATIONS


- Voltage rating: 600V AC, DC
- Current rating: 15A, AC, DC
- Withstanding Voltage: 5000V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C~+85° C
- Contack resistance: 20mΩ max

TERMINAL


- Part No.: T6351BT
- Applicable wire: AWG#18-#22
- Material: Brass
- Finish: Tin Plated
- The Dimension Marked "▼" Must Be Recorded

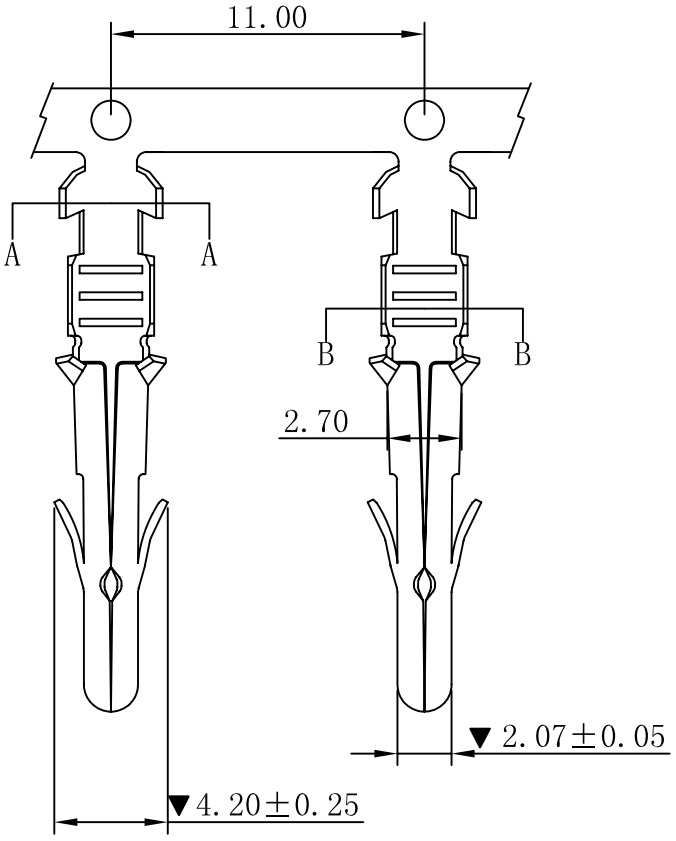

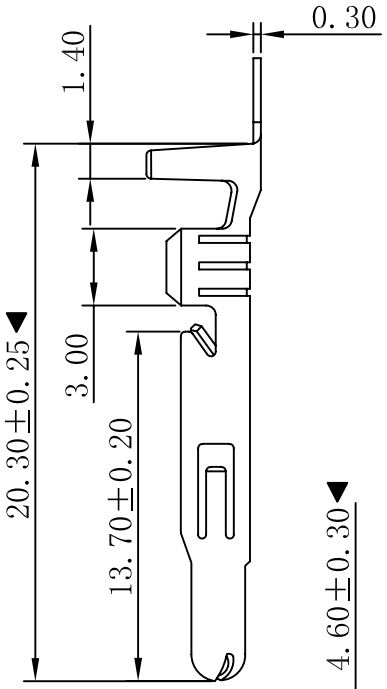

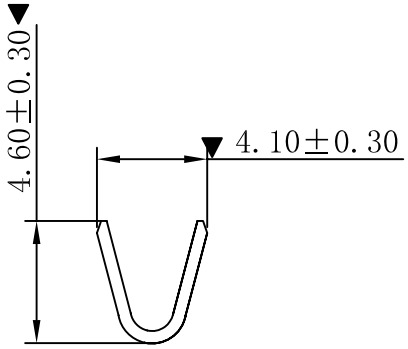

SEC: A-A

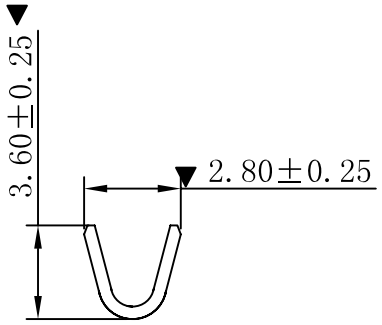

SEC: B-B

MARK	DESCRIPTION	DATE	REVISED	APPROVED
ΔX				
ΔX				
ΔX				

REVISIONS

UNSPECIFIED TOLERANCES	
ANGLAR	±5°
L≤ 4	±0.2
4<L≤ 16	±0.3
16<L≤ 63	±0.4
L> 63	±0.5

www.hiemi.cn

HIEMI TECHNOLOGY CO., LTD

DSND		SCALE: N/A
DWN		VIEW:
CHKD		UNIT: mm/in
APPD		SIZE: A4


6.35mm Male Terminal Connector Series


PART NO.: T6351BT


DWG NO.:

WEIGHT	SHEET	REVISION
	1/1	A0

RoHS

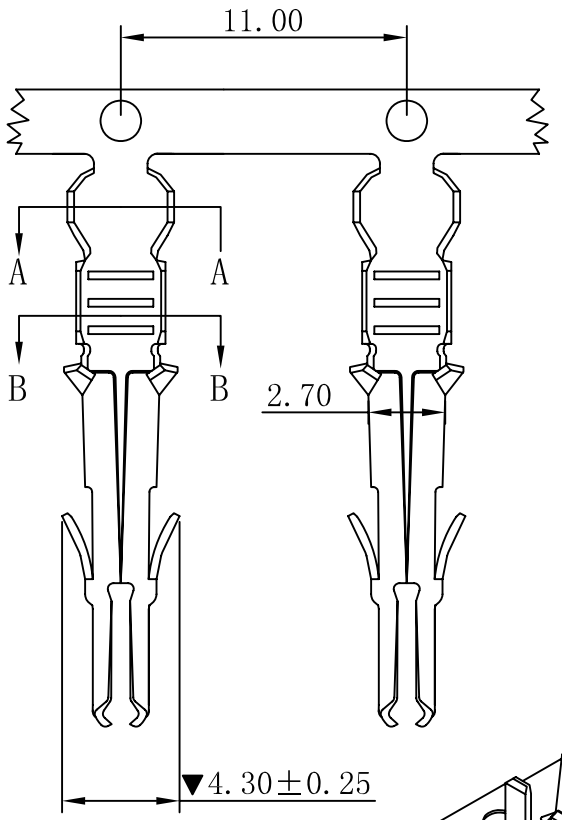

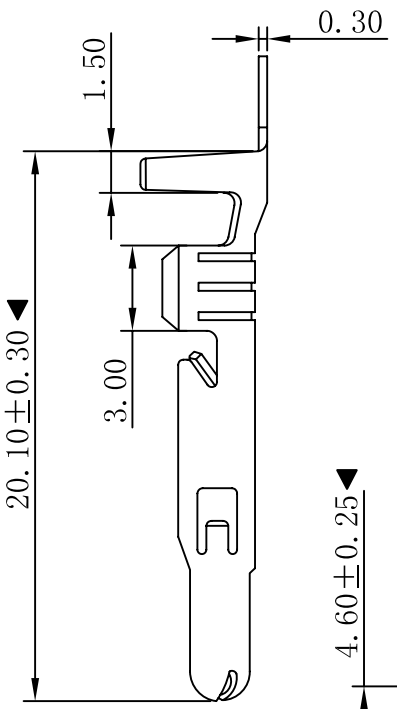

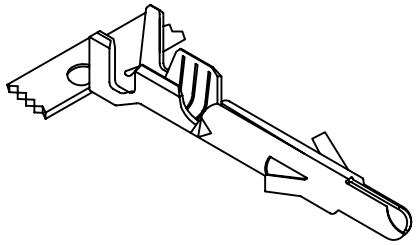


■ SPECIFICATIONS


- Voltage rating: 600V AC, DC
- Current rating: 15A, AC, DC
- Withstanding Voltage: 5000V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C~+85° C
- Contack resistance: 20mΩ max

■ TERMINAL

- Part No.: T6351BT-B
- Applicable wire: AWG#18-#22
- Material: Brass
- Finish: Tin Plated
- The Dimension Marked "▼" Must Be Recorded

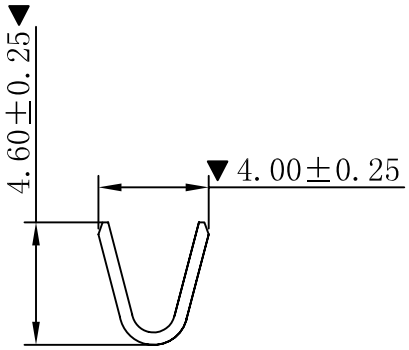

SEC: A-A

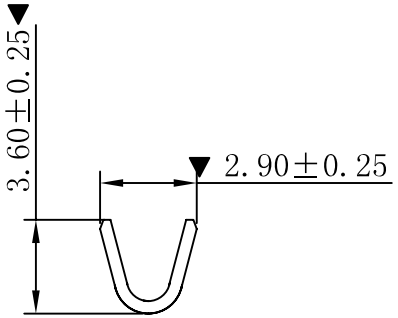

SEC: B-B

MARK	DESCRIPTION	DATE	REVISED	APPROVED
ΔX				
ΔX				
ΔX				

REVISIONS

UNSPECIFIED TOLERANCES	
ANGLAR	±5°
L≤ 4	±0.2
4<L≤ 16	±0.3
16<L≤ 63	±0.4
L> 63	±0.5

www.hiemi.cn

HIEMI TECHNOLOGY CO., LTD

DSND		SCALE: N/A
DWN		VIEW:
CHKD		UNIT: mm/in
APPD		SIZE: A4


6.35mm Male Terminal Connector Series


PART NO.: T6351BT-B


DWG NO.:

WEIGHT	SHEET	REVISION
	1/1	A0

RoHS

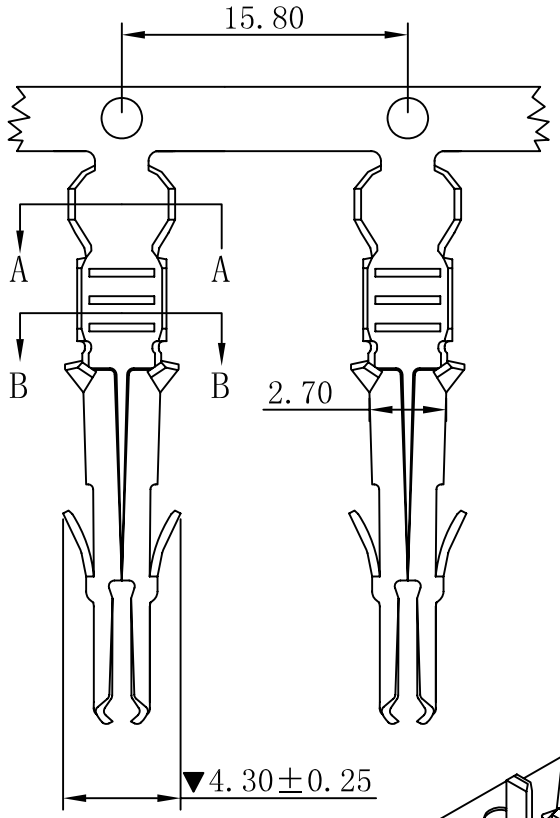

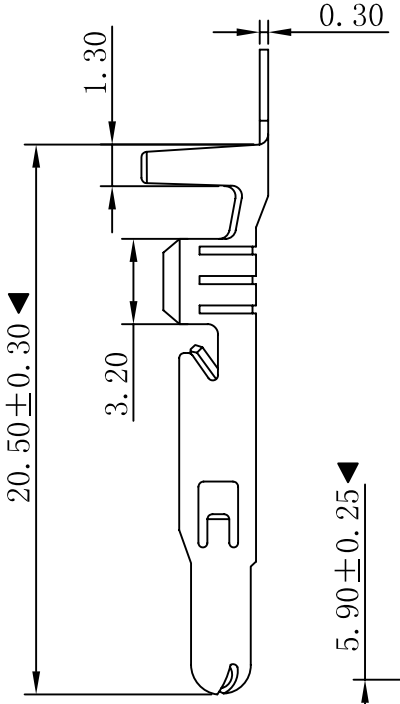

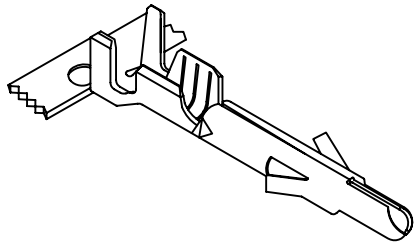


■ SPECIFICATIONS


- Voltage rating: 600V AC, DC
- Current rating: 15A, AC, DC
- Withstanding Voltage: 5000V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C~+85° C
- Contack resistance: 20mΩ max

■ TERMINAL

- Part No.: T6351BT-B-CGJ
- Applicable wire: AWG#16-#14 or 2x18#
- Material: Brass
- Finish: Tin Plated
- The Dimension Marked "▼" Must Be Recorded

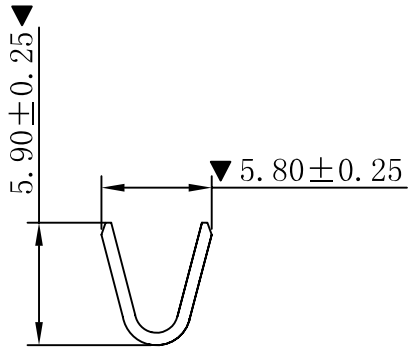

SEC: A-A

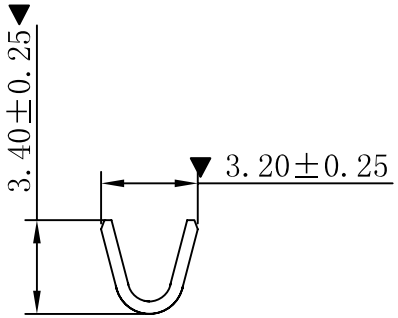

SEC: B-B

MARK	DESCRIPTION	DATE	REVISED	APPROVED
ΔX				
ΔX				
ΔX				

REVISIONS

UNSPECIFIED TOLERANCES	
ANGLAR	±5°
L≤ 4	±0.2
4<L≤ 16	±0.3
16<L≤ 63	±0.4
L> 63	±0.5


www.hiemi.cn


DSND		SCALE: N/A	6.35mm Male Terminal Connector Series
DWN		VIEW:	PART NO.: T6351BT-B-CGJ
CHKD		UNIT: mm/in	DWG NO.:
APPD		SIZE: A4	


HIEMI TECHNOLOGY CO., LTD

WEIGHT	SHEET	REVISION
	1/1	A0

RoHS

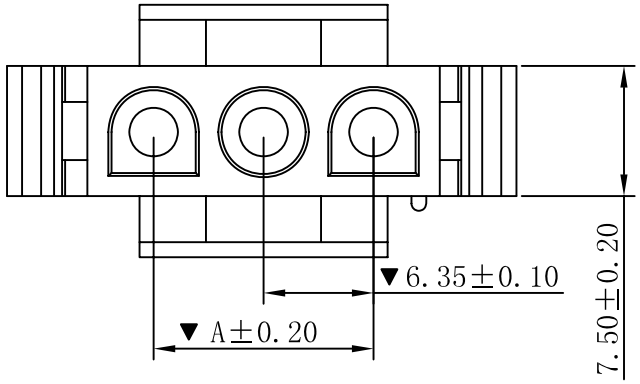

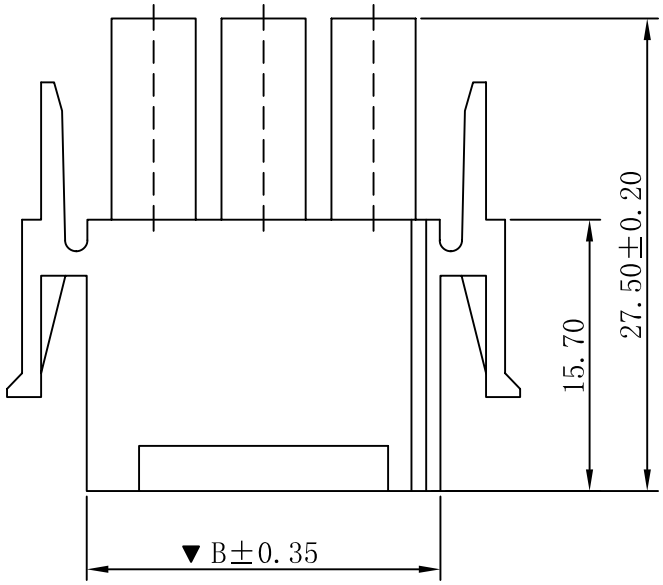

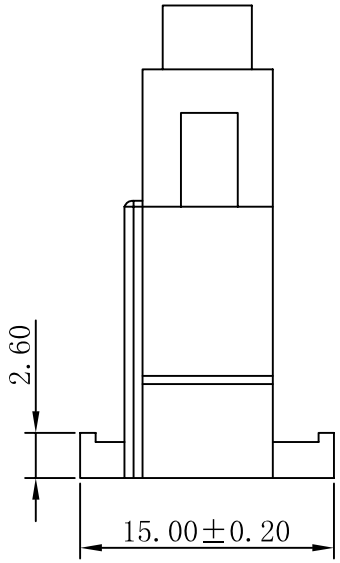

■ SPECIFICATIONS

- Voltage rating: 600V AC, DC
- Current rating: 15A, AC, DC
- Withstanding Voltage: 5000V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -40° C~+105° C
- Contact resistance: 20mΩ max

■ HOUSING

- Part No.: H6351-NP
- Poles: 02-08P
- Housing Material: Nylon 66 UL94V-2
- The Dimension Marked "▼" Must Be Recorded

PART NO.	Dimensions (mm)	
	A	B
02	6.35	13.80
03	12.70	20.25
04	19.05	26.60
05	25.40	32.95
06	31.75	39.40
08	44.45	52.00

MARK	DESCRIPTION	DATE	REVISED	APPROVED
ΔX				
ΔX				
ΔX				

REVISIONS

ANGLAR	±5°
L≤ 4	±0.2
4<L≤ 16	±0.3
16<L≤ 63	±0.4
L> 63	±0.5

UNSPECIFIED TOLERANCES


www.hiemi.cn

DSND		SCALE: N/A	6.35mm Male Housing Connector Series
DWN		VIEW:	PART NO.: H6351-NP
CHKD		UNIT: mm/in	DWG NO.:
APPD		SIZE: A4	

HIEMI TECHNOLOGY CO., LTD

WEIGHT	SHEET	REVISION
	1/1	A0

RoHS

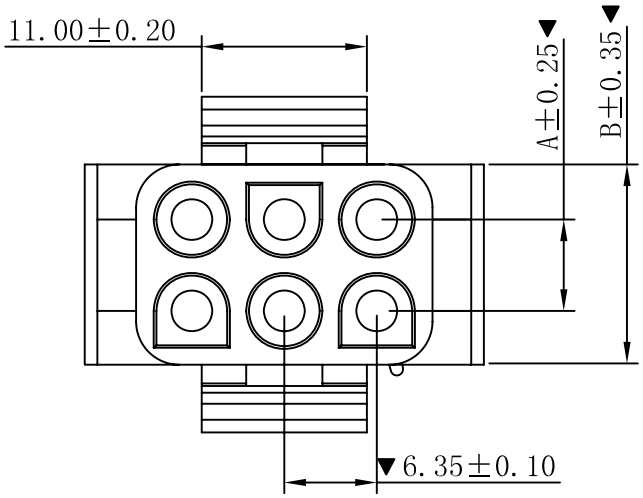



■ SPECIFICATIONS

- Voltage rating: 600V AC, DC
- Current rating: 15A, AC, DC
- Withstanding Voltage: 5000V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -40° C~+105° C
- Contact resistance: 20mΩ max

■ HOUSING

- Part No.: H6351-3xNP
- Poles: 06-15P
- Housing Material: Nylon 66 UL94V-2
- The Dimension Marked "▼" Must Be Recorded

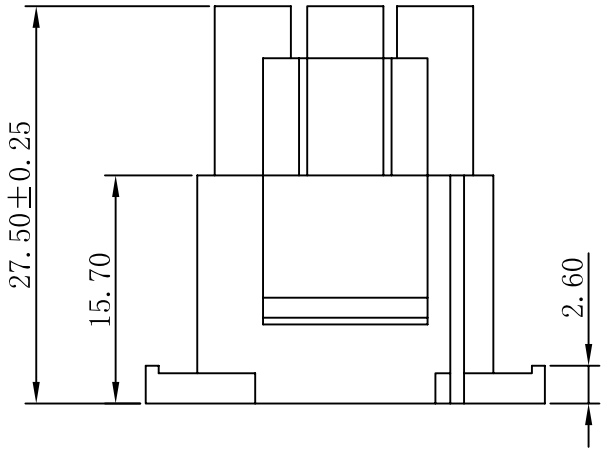

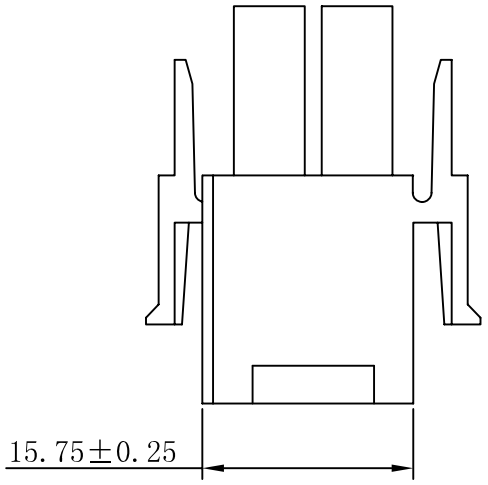

PART NO.	Dimensions (mm)	
	A	B
3x02	6.35	14.10
3x03	12.70	20.25
3x04	19.05	27.40
3x05	25.40	34.10

MARK	DESCRIPTION	DATE	REVISED	APPROVED
ΔX				
ΔX				
ΔX				

REVISIONS

www.hiemi.cn

UNSPECIFIED TOLERANCES	
ANGLAR	±5°
L≤ 4	±0.2
4<L≤ 16	±0.3
16<L≤ 63	±0.4
L> 63	±0.5

HIEMI TECHNOLOGY CO., LTD

DSND		SCALE: N/A	6.35mm Male Housing Connector Series
DWN		VIEW:	PART NO.: H6351-3xNP
CHKD		UNIT: mm/in	DWG NO.:
APPD		SIZE: A4	

WEIGHT	SHEET	REVISION
	1/1	A0