




RoHS






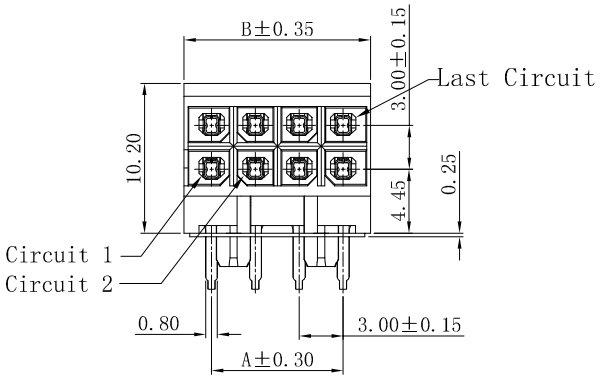

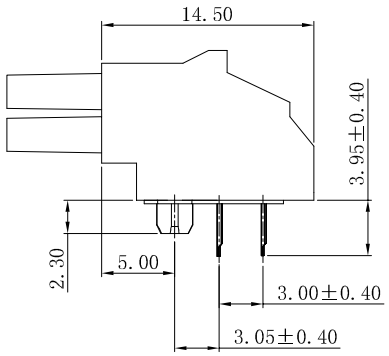




P.C.B LAYOUT: TOP VIEW
Poles: 04P



P.C.B LAYOUT: TOP VIEW
Poles: 06P



P.C.B LAYOUT: TOP VIEW
Poles: 08P~24P

■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 5A, AC, DC
- Withstanding Voltage: 1000V AC/minute
- Insulation resistance:1000MΩ min
- Temperature range: -25° C~+85° C
- Contact resistance: 20mΩ max

■ WAFER

- Part No.: W3045LBKGR-2xNP
- Poles: 04-24P
- Housing Material: LCP UL94V-0 Black
- POSITIONING STRIP : MYLAR COLOR NATURAL
- Pin Material: Phosphor Bronze
- Contact Area Plating: Tin-Plated
- The Dimension Marked "▼" Must Be Recorded

Poles	Dimensions(mm)		
	A	B	C
04	3.00	6.70	
06	6.00	9.70	
08	9.00	12.70	6.00
10	12.00	15.70	9.00
12	15.00	18.70	12.00
14	18.00	21.70	15.00
16	21.00	24.70	18.00
18	24.00	27.70	21.00
20	27.00	30.70	24.00
22	30.00	33.70	27.00
24	33.00	36.70	30.00

MARK	DESCRIPTION	DATE	REVISED	APPROVED
ΔX				
ΔX				
ΔX				

REVISIONS

UNSPECIFIED TOLERANCES	
ANGLAR	±5°
L≤ 4	±0.2
4<L≤ 16	±0.3
16<L≤ 63	±0.4
L> 63	±0.5

www.hiemi.cn

HIEMI TECHNOLOGY CO., LTD

DSND		SCALE: N/A	Molex3.00mm 90° 喇叭口公座 Wafer Connector Series
DWN		VIEW:	PART NO.: W3045LBKGR-2xNP
CHKD		UNIT: mm/in	DWG NO.:
APPD		SIZE: A4	

WEIGHT	SHEET	REVISION
	1/1	A0