

RoHS

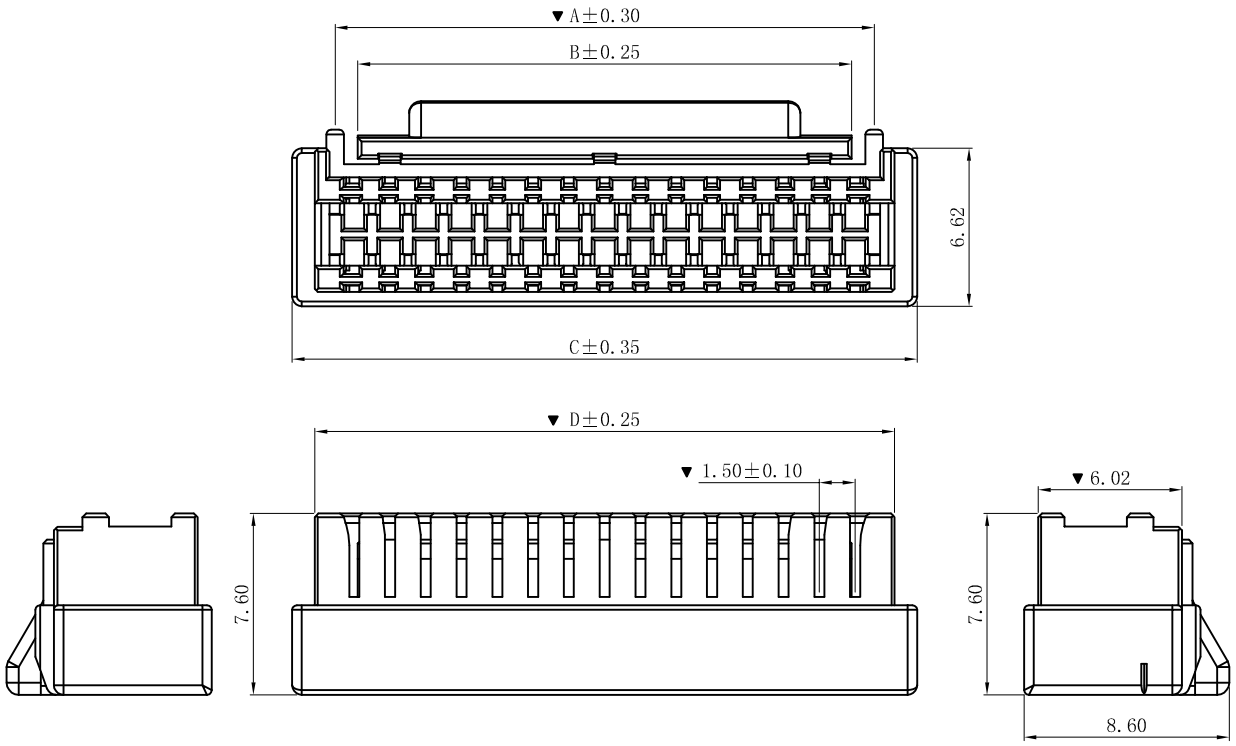

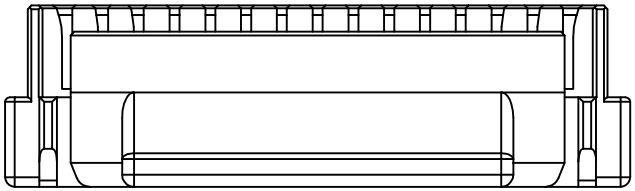

■ SPECIFICATIONS

- Voltage rating: 100V AC, DC
- Current rating: 2A, AC, DC
- Withstanding Voltage: 500V AC/minute
- Insulation resistance: 500MΩ min
- Temperature range: -25° C~+85° C

■ HOUSING

- Part No.: H1505-2xNP
- Poles : 10-30P
- Housing Material: PA66 UL94V-0
- The Dimension Marked "▼" Must Be Recorded

Contacts	Dimensions(mm)			
	Dim A	Dim B	Dim C	Dim D
2x05	7..50	6.00	11.20	9.30
2x06	9.00	7.50	12.70	10.80
2x07	10.50	9.00	14.20	12.30
2x08	12.00	10.50	15.70	13.80
2x09	13.50	12.00	17.20	15.30
2x10	15.00	13.50	18.70	16.80
2x13	19.50	17.50	23.20	21.30
2x15	22.50	20.50	26.20	24.30

MARK	DESCRIPTION	DATE	REVISED	APPROVED
ΔX				
ΔX				
ΔX				

REVISIONS

ANGLAR	±5°
L≤ 4	±0.2
4<L≤ 16	±0.3
16<L≤ 63	±0.4
L> 63	±0.5

UNSPECIFIED TOLERANCES


www.hiemi.cn

HIEMI TECHNOLOGY CO., LTD

DSND		SCALE: N/A	ZPD1.50mm Male Housing Connector Series
DWN		VIEW:	PART NO.: H1505-2xNP
CHKD		UNIT: mm/in	DWG NO.:
APPD		SIZE: A4	

WEIGHT	SHEET	REVISION
	1/1	A0

RoHS

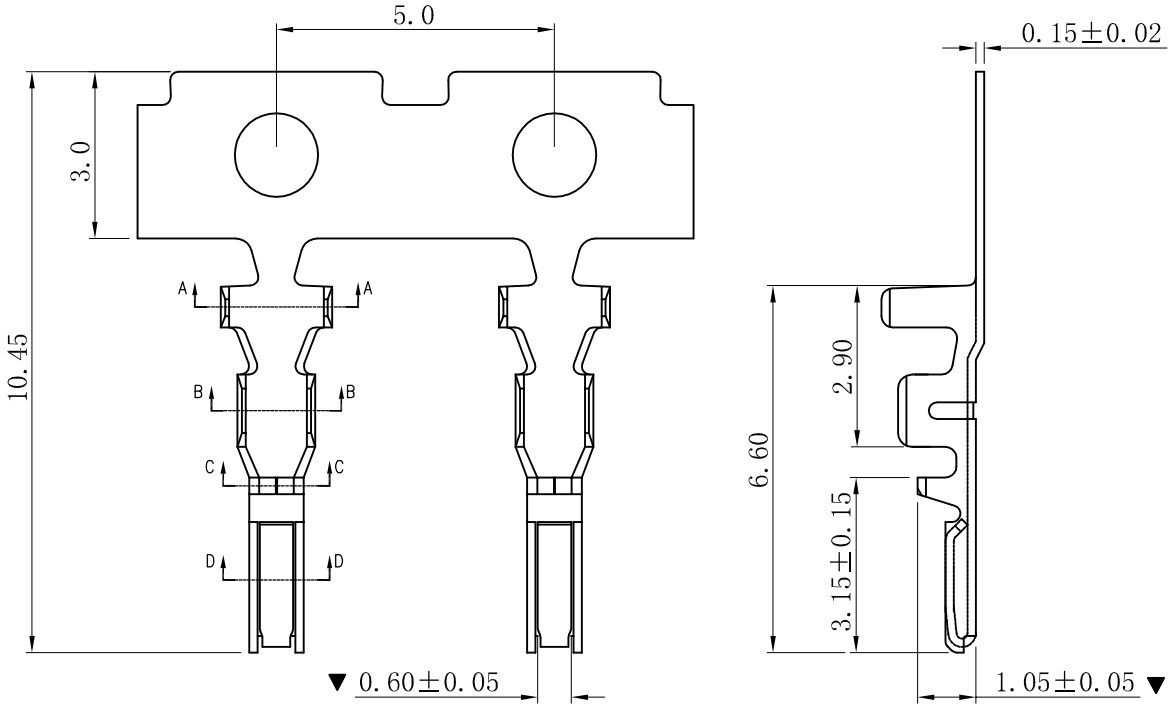


■ SPECIFICATIONS


- Voltage rating: 100V AC, DC
- Current rating: 2A, AC, DC
- Withstanding Voltage: 500V AC/minute
- Temperature range: -25° C~+85° C
- Contact resistance: 20mΩ max

■ TERMINAL


- Part No.: T1505PT
- Applicable wire: AWG#24-#28
- Material: Phosphor Bronze
- Finish: Tin-Plated
- The Dimension Marked "▼" Must Be Recorded

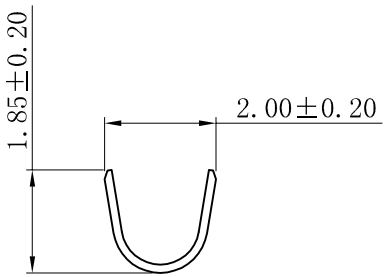


SECTION: A-A

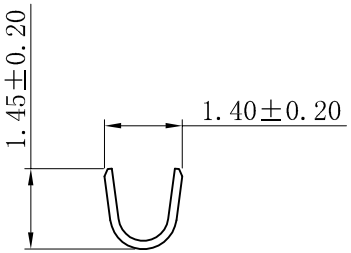

SECTION: B-B



SECTION: C-C



SECTION: D-D

					ANGLAR	±5°
ΔX					L≤ 4	±0.2
ΔX					4<L≤ 16	±0.3
ΔX					16<L≤ 63	±0.4
MARK	DESCRIPTION	DATE	REVISED	APPROVED	L> 63	±0.5
REVISIONS					UNSPECIFIED TOLERANCES	

www.hiemi.cn

HIEMI TECHNOLOGY CO., LTD

DSND		SCALE: N/A	ZPD1.50mm Female Terminal Connector Series
DWN		VIEW:	PART NO.: T1505PT
CHKD		UNIT: mm/in	DWG NO.:
APPD		SIZE: A4	

WEIGHT	SHEET	REVISION
	1/1	A0