



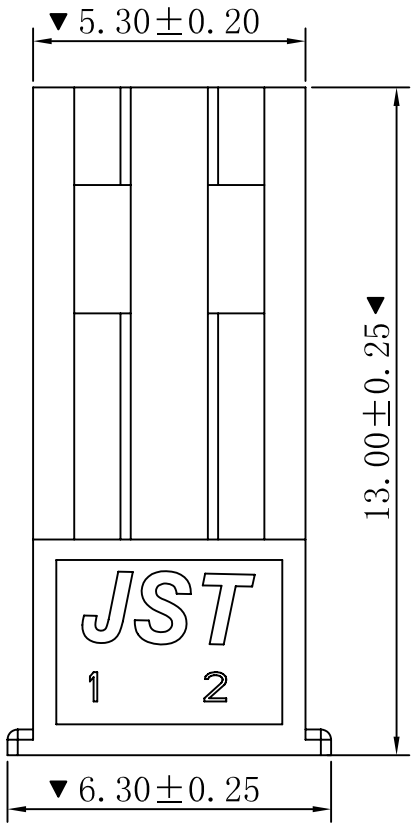

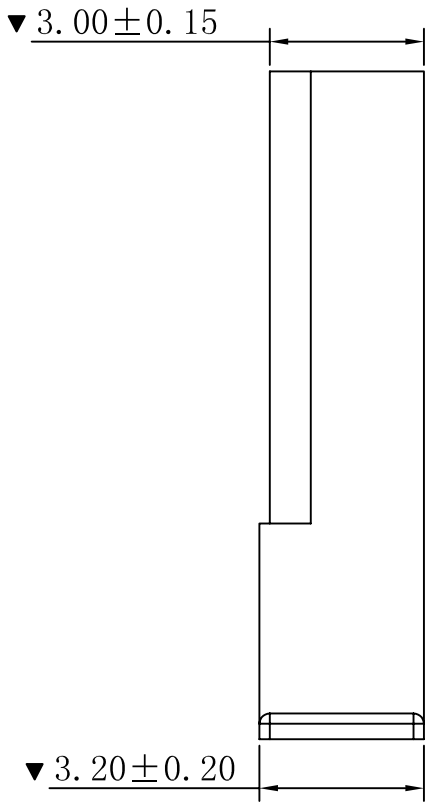


■SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 3A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 500MΩ min
- Temperature range: -25° C~+85° C
- Contact resistance: 20mΩ max

■HOUSING

- Part No.: H2513-02P
- Housing Material: Nylon66 UL94V-2
- The Dimension Marked "▼" Must Be Recordec

(J)H2513-02P-RD (Red)
(J)H2513-02P-WI (White)
(J)H2513-02P-BK (Black)

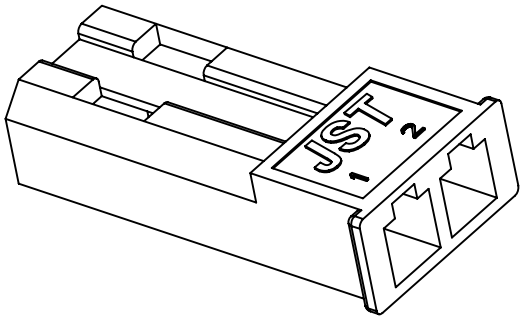


					ANGLAR	±5°
ΔX					L≤ 4	±0.2
ΔX					4<L≤ 16	±0.3
ΔX					16<L≤ 63	±0.4
MARK	DESCRIPTION	DATE	REVISED	APPROVED	L> 63	±0.5
REVISIONS					UNSPECIFIED TOLERANCES	

www.hiemi.cn

DSND		SCALE: N/A	SYP2.50mm Male Housing Connector Series
DWN		VIEW:	PART NO.: H2513-02P
CHKD		UNIT: mm/in	DWG NO.:
APPD		SIZE: A4	

HIEMI TECHNOLOGY CO., LTD

WEIGHT	SHEET	REVISION
	1/1	A0

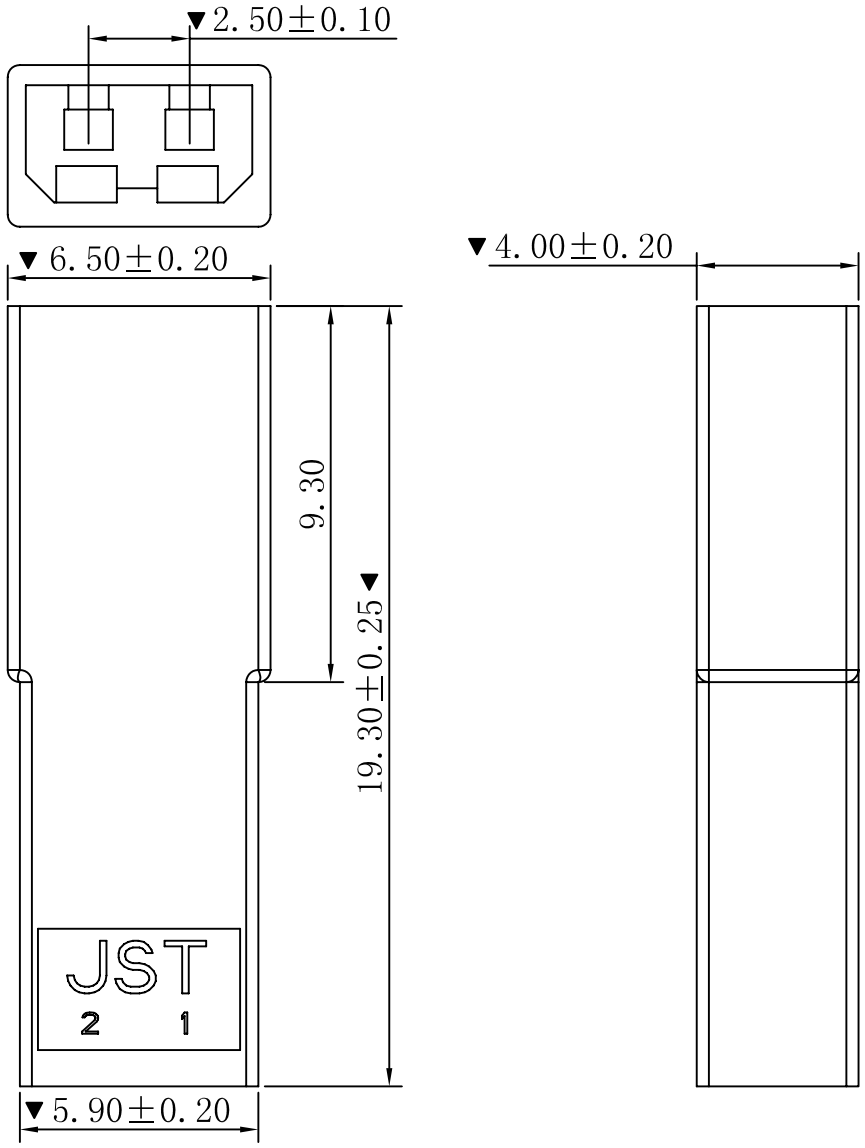


■SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 3A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 500MΩ min
- Temperature range: -25° C~+85° C
- Contact resistance: 20mΩ max

■HOUSING

- Part No.: H2514-02P
- Housing Material: Nylon66 UL94V-2
- The Dimension Marked "▼" Must Be Recorded

(J)H2514-02P-RD (Red)
(J)H2514-02P-WI (White)
(J)H2514-02P-BK (Black)

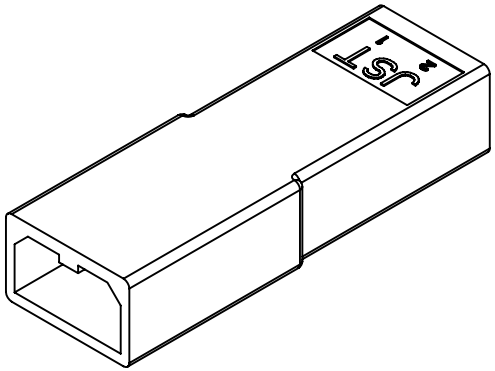


					ANGLAR	±5°
ΔX					L≤ 4	±0.2
ΔX					4<L≤ 16	±0.3
ΔX					16<L≤ 63	±0.4
MARK	DESCRIPTION	DATE	REVISED	APPROVED	L> 63	±0.5
REVISIONS					UNSPECIFIED TOLERANCES	


www.hiemi.cn

DSND		SCALE: N/A	SYP2.50mm Female Housing Connector Series
DWN		VIEW:	PART NO.: H2514-02P
CHKD		UNIT: mm/in	DWG NO.:
APPD		SIZE: A4	


HIEMI TECHNOLOGY CO., LTD

WEIGHT	SHEET	REVISION
	1/1	A0

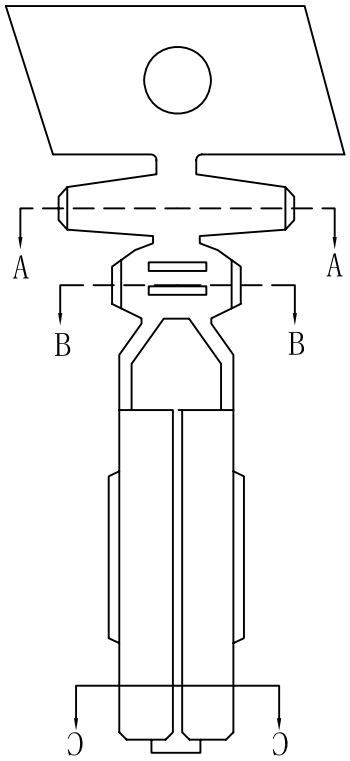


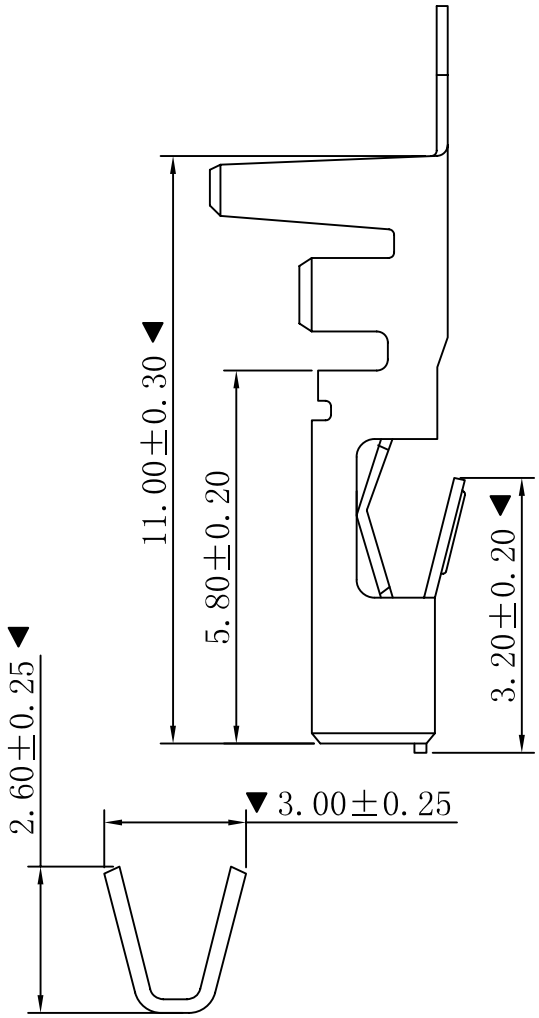

SEC:A-A

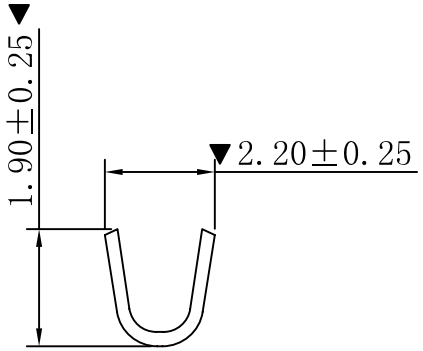

SEC:B-B

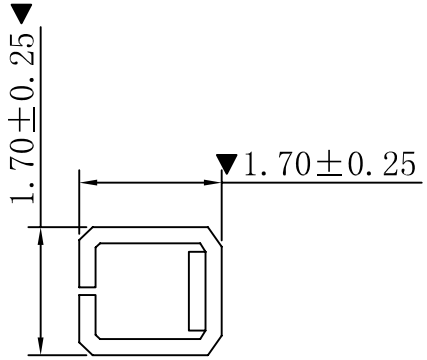

SEC:C-C

■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 3A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance:500MΩ min
- Temperature range: -25° C~+85° C
- Contack resistance: 20mΩ max

■ TERMINAL

- Part No.: T2513BT
- Applicable wire: AWG#22-#28
- Material: Brass
- Finish: Tin Plated
- The Dimension Marked "▼" Must Be Recorded

MARK	DESCRIPTION	DATE	REVISED	APPROVED
ΔX				
ΔX				
ΔX				

REVISIONS


UNSPECIFIED TOLERANCES	
ANGLAR	±5°
L≤ 4	±0.2
4<L≤ 16	±0.3
16<L≤ 63	±0.4
L> 63	±0.5


www.hiemi.cn

DSND		SCALE: N/A	SYP2.50mm Female Terminal Connector Series
DWN		VIEW:	PART NO.: T2513BT
CHKD		UNIT: mm/in	DWG NO.:
APPD		SIZE: A4	

HIEMI TECHNOLOGY CO., LTD

WEIGHT	SHEET	REVISION
	1/1	A0

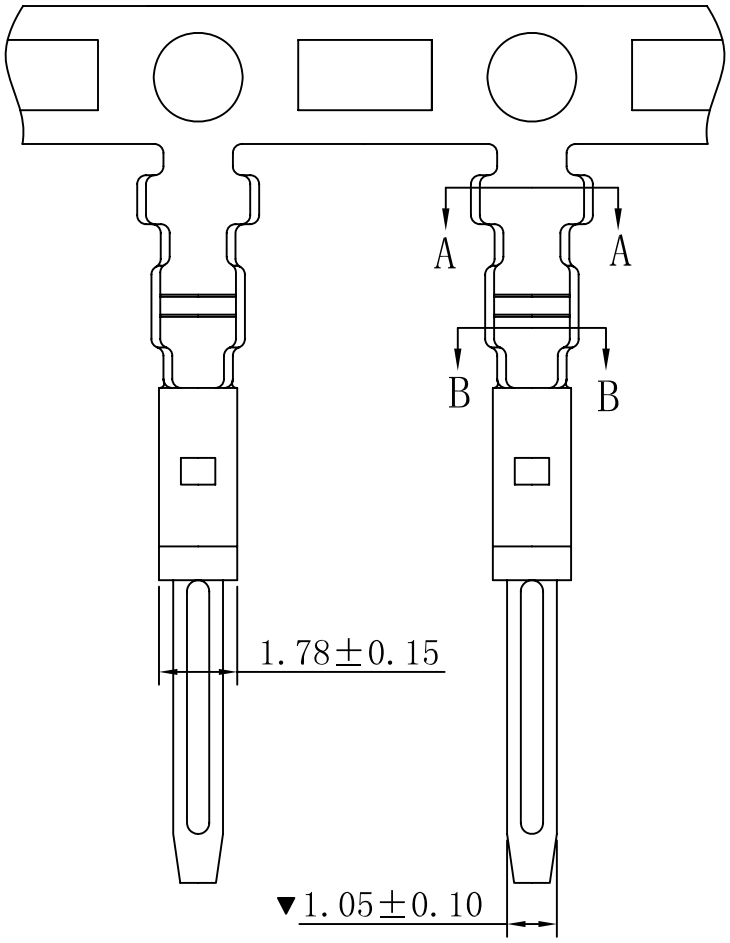

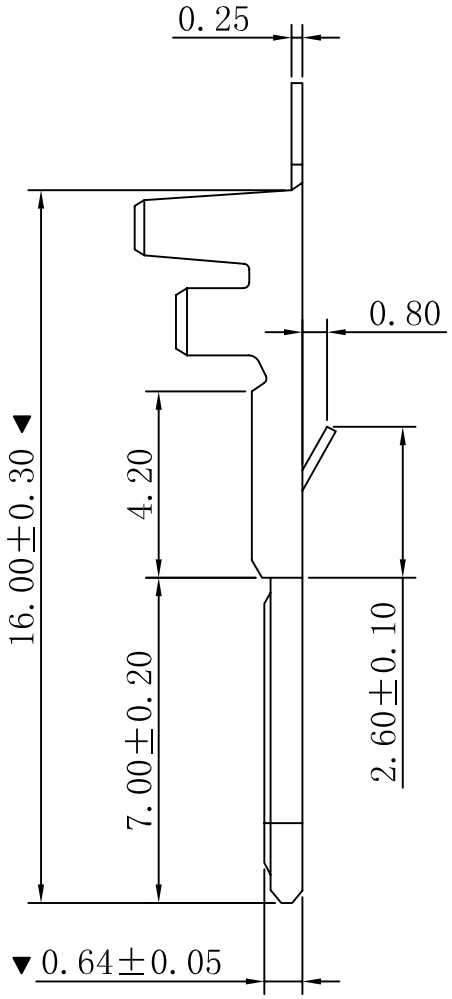


■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 3A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance:500MΩ min
- Temperature range: -25° C~+85° C
- Contack resistance: 20mΩ max

■ TERMINAL

- Part No.: T2514BT
- Applicable wire: AWG#22-#28
- Material: Brass
- Finish: Tin Plated
- The Dimension Marked "▼" Must Be Recorded

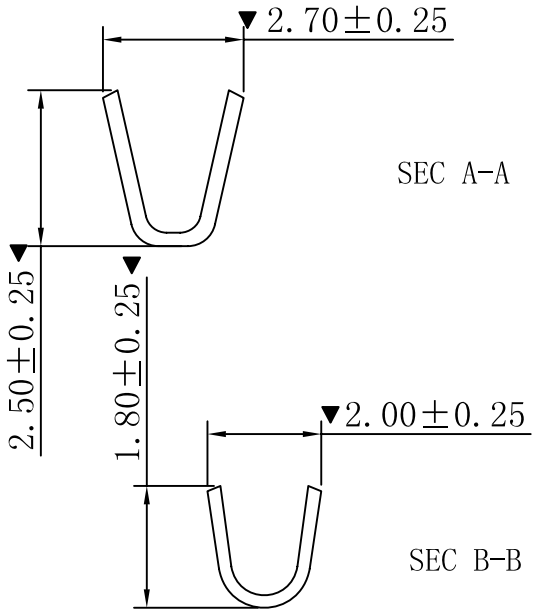

MARK	DESCRIPTION	DATE	REVISED	APPROVED
ΔX				
ΔX				
ΔX				

REVISIONS

UNSPECIFIED TOLERANCES	
ANGLAR	±5°
L≤ 4	±0.2
4<L≤ 16	±0.3
16<L≤ 63	±0.4
L> 63	±0.5

www.hiemi.cn

HIEMI TECHNOLOGY CO., LTD

DSND		SCALE: N/A	SYP2.50mm Male Terminal Connector Series
DWN		VIEW:	PART NO.: T2514BT
CHKD		UNIT: mm/in	DWG NO.:
APPD		SIZE: A4	

WEIGHT	SHEET	REVISION
	1/1	A0