



RoHS

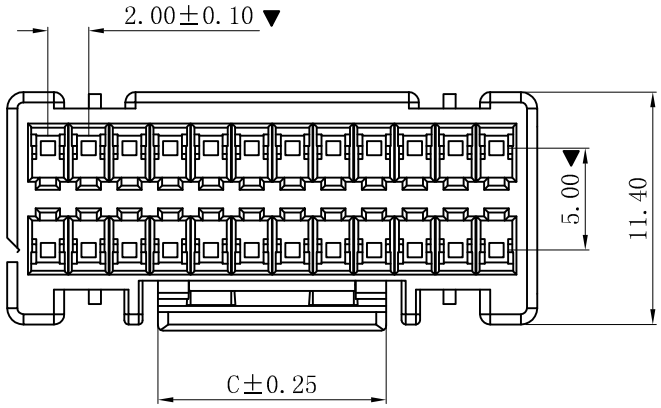

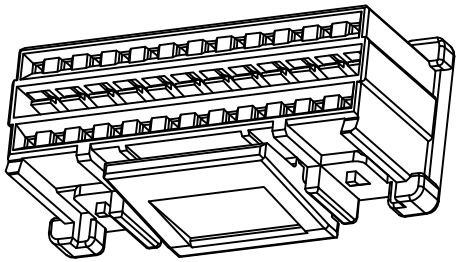

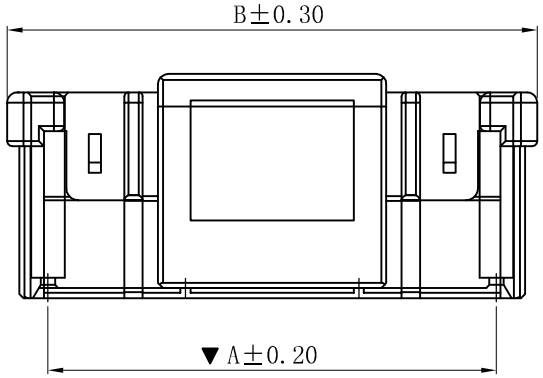

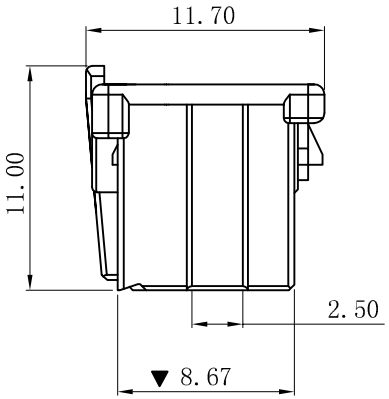

■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 3A, AC, DC
- Withstanding Voltage: 800V AC/minute
- Insulation resistance:1000MΩ min
- Temperature range: -25° C~+85° C
- Contact resistance: 15mΩ max

■ HOUSING

- Part No.: H2022-2xNP
- Poles : 08-42P
- Housing Material: PA66 UL94V-0
- The Dimension Marked "▼" Must Be Recorded

Poles	Dimension mm		
	A	B	C
2x04	6.00	10.00	4.80
2x05	8.00	12.00	4.80
2x06	10.00	14.00	4.80
2x07	12.00	16.00	4.80
2x08	14.00	18.00	4.80
2x09	16.00	20.00	4.80
2x10	18.00	22.00	11.20
2x11	20.00	24.00	11.20
2x12	22.00	26.00	11.20
2x13	24.00	28.00	11.20
2x14	26.00	30.00	11.20
2x15	28.00	32.00	11.20
2x16	30.00	34.00	15.20
2x17	32.00	36.00	15.20
2x18	34.00	38.00	15.20
2x19	36.00	40.00	15.20
2x20	38.00	42.00	15.20
2x21	40.00	44.00	15.20

MARK	DESCRIPTION	DATE	REVISED	APPROVED
ΔX				
ΔX				
ΔX				

REVISIONS

UNSPECIFIED TOLERANCES	
ANGLAR	±5°
L≤ 4	±0.2
4<L≤ 16	±0.3
16<L≤ 63	±0.4
L> 63	±0.5

www.hiemi.cn

HIEMI TECHNOLOGY CO., LTD

DSND		SCALE: N/A
DWN		VIEW:
CHKD		UNIT: mm/in
APPD		SIZE: A4


PND 2.00mm 2xNP Housing Connector Series

PART NO.: H2022-2xNP

DWG NO.:

WEIGHT	SHEET	REVISION
	1/1	A0

RoHS

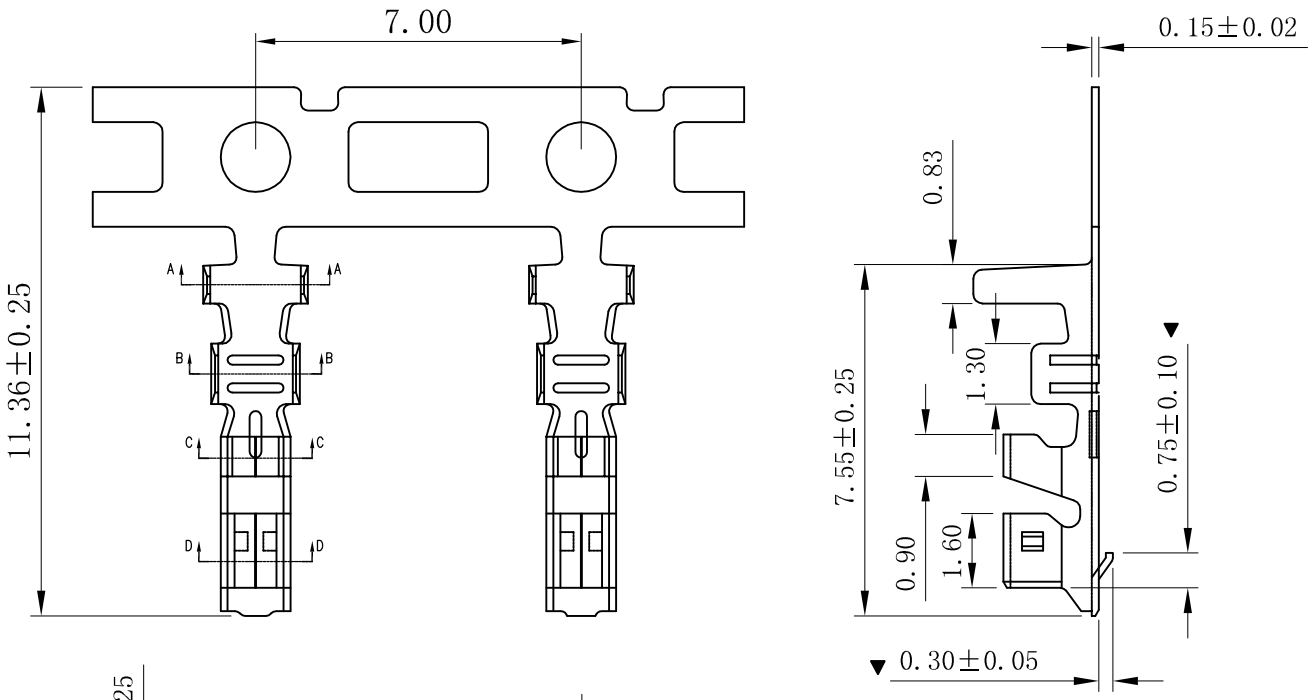


SPECIFICATIONS


- Voltage rating: 250V AC, DC
- Current rating: 3A, AC, DC
- Withstanding Voltage: 800V AC/minute
- Temperature range: -25° C~+85° C
- Contact resistance: 15mΩ max

TERMINAL


- Part No.: T2022PT
- Applicable wire: AWG#22-#28
- Material: Phosphor Bronze
- Finish: Tin-Plated
- The Dimension Marked "▼" Must Be Recorded

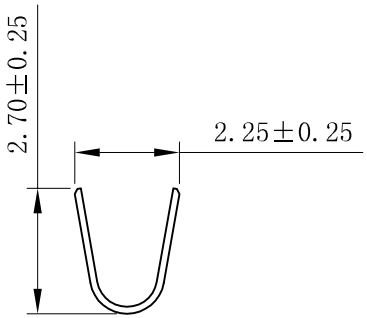


SECTION A-A

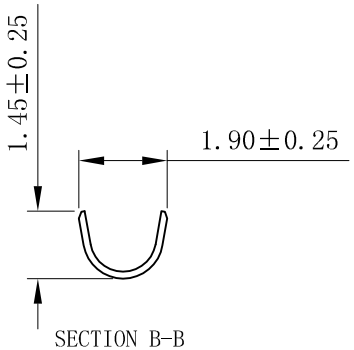

SECTION B-B



SECTION C-C



SECTION D-D

					ANGLAR	±5°
ΔX					L≤ 4	±0.2
ΔX					4<L≤ 16	±0.3
ΔX					16<L≤ 63	±0.4
MARK	DESCRIPTION	DATE	REVISED	APPROVED	L> 63	±0.5
REVISIONS					UNSPECIFIED TOLERANCES	

www.hiemi.cn

HIEMI TECHNOLOGY CO., LTD

DSND		SCALE: N/A	PND 2.00mm PITCH Terminal Connector Series
DWN		VIEW:	PART NO.: T2022PT
CHKD		UNIT: mm/in	DWG NO.:
APPD		SIZE: A4	

WEIGHT	SHEET	REVISION
	1/1	A0