

RoHS

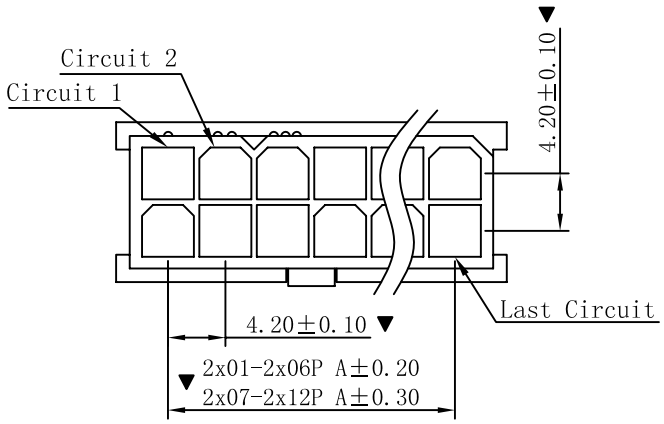



SPECIFICATIONS


- Voltage rating: 600V AC, DC
- Current rating: 7A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance:1000MΩ min
- Temperature range: -25° C~+85° C
- Contact resistance: 20mΩ max


HOUSING

- Part No.: H4202N-2xNP-XX
- Poles: 02-24P
- Housing Material:Nylon66 UL94V-2 or UL94V-0
- Mates With: H4201 dual row receptacle
- Use With: T4201 terminals
- The Dimension Marked "▼" Must Be Recorded

H4202N-2xNP-XX

- None:Pa66-V2 Natural
- BK:Pa66-V2 Black
- V0:Pa66-V0 Natural
- V0BK:Pa66-V0 Black

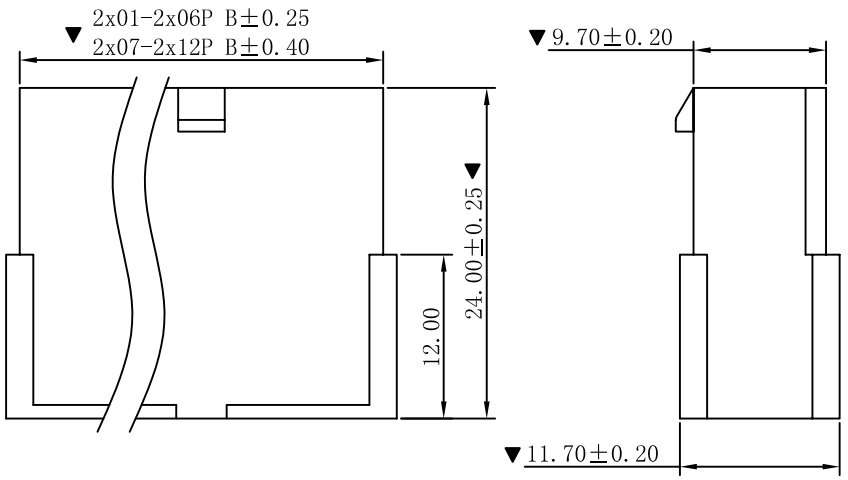

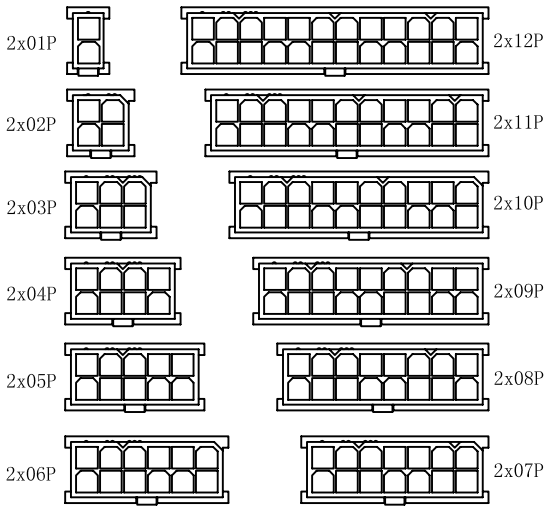

CIRCUIT SIZE LAYOUT

PART NO.	Dimensions (mm)	
	A	B
2x01	--	5.60
2x02	4.20	9.80
2x03	8.40	14.00
2x04	12.60	18.20
2x05	16.80	22.40
2x06	21.00	26.60
2x07	25.20	30.80
2x08	29.40	35.00
2x09	33.60	39.20
2x10	37.80	43.40
2x11	42.00	47.60
2x12	46.20	51.80

MARK	DESCRIPTION	DATE	REVISED	APPROVED
ΔX				
ΔX				
ΔX				

REVISIONS

UNSPECIFIED TOLERANCES	
ANGLAR	±5°
L≤ 4	±0.2
4<L≤ 16	±0.3
16<L≤ 63	±0.4
L> 63	±0.5

www.hiemi.cn

HIEMI TECHNOLOGY CO., LTD

DSND		SCALE: N/A
DWN		VIEW:
CHKD		UNIT: mm/in
APPD		SIZE: A4

MX4.20mm Female Housing Connector Series

PART NO.: H4202N-2xNP-XX

DWG NO.:

WEIGHT	SHEET	REVISION
	1/1	A0