


RoHS




06, 10, 14 Poles





04, 08, 12, 16 Poles




Only for CKT 06, 10, 14

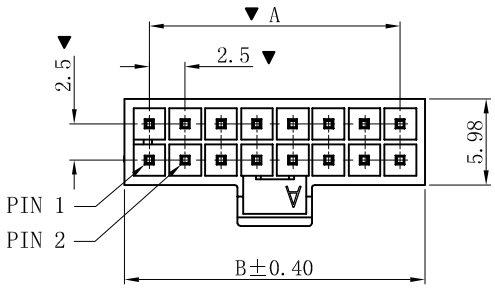

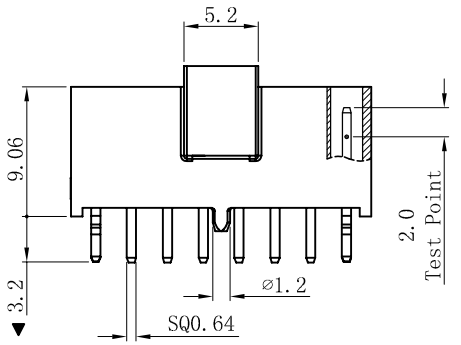



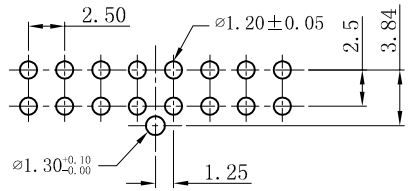

Recommended P.C.B Hole Dimension
Recommended P.C.B Thickness 1.6~2.4mm

Part No:
W2520V-2xNP-X
A: A Key(Black Plastic)
B: B Key(Nature Plastic)


■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 4A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance:1000MΩ min
- Temperature range: -25° C~+105° C
- Contact resistance: 20mΩ max


■ WAFER

- Part No.: W2520V-2xNP-X
- Poles: 04-16P
- Housing Material: LCP UL94V-0
- Pin Material: Brass
- Contact Area Plating: Tin-Plated
- The Dimension Marked "▼" Must Be Recorded

W2520V-2xNP-A

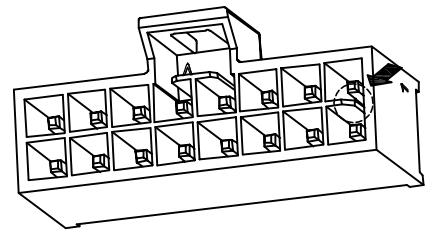

W2520V-2xNP-B

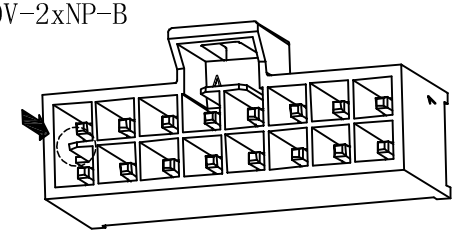

Dimensional Lnformation (mm)

Poles	Dim.A	Dim.B
04P~16P	2.50xNP-2.5	2.50xNP+0.94

MARK	DESCRIPTION	DATE	REVISED	APPROVED
ΔX				
ΔX				
ΔX				

REVISIONS

UNSPECIFIED TOLERANCES	
ANGLAR	±5°
L≤ 4	±0.2
4<L≤ 16	±0.3
16<L≤ 63	±0.4
L> 63	±0.5

www.hiemi.cn

HIEMI TECHNOLOGY CO., LTD

DSND		SCALE: N/A
DWN		VIEW:
CHKD		UNIT: mm/in
APPD		SIZE: A4

Molex 2.50mm 2xNP 180° Wafer Connector Series

PART NO.: W2520V-2xNP-X

DWG NO.:

WEIGHT	SHEET	REVISION
	1/1	A0