


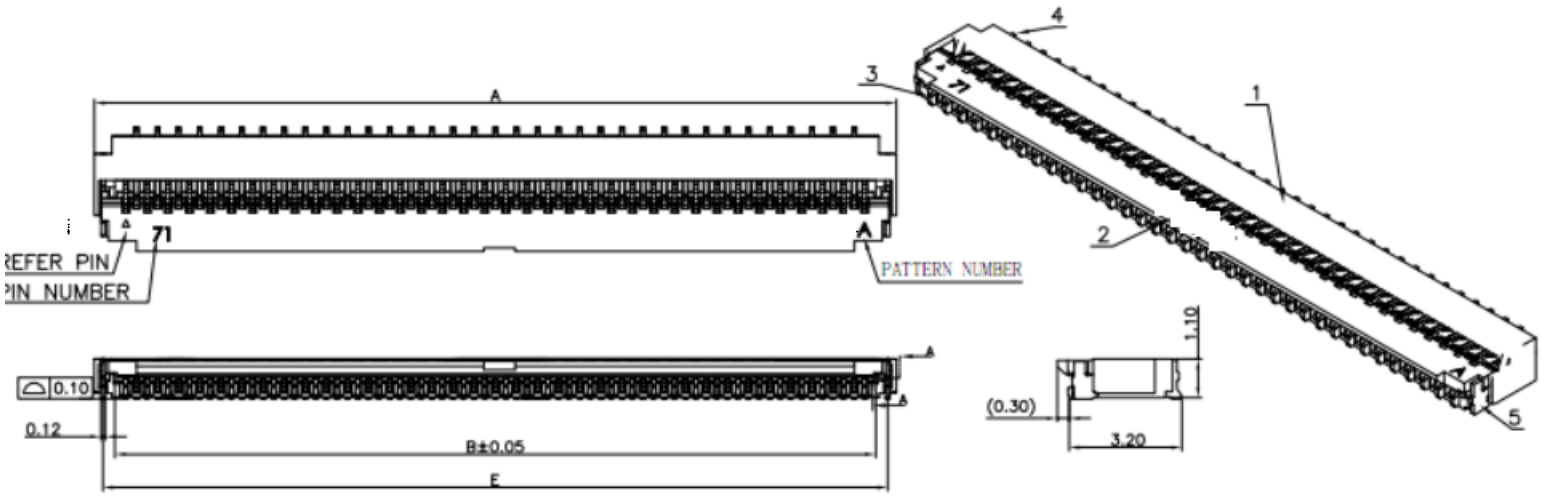


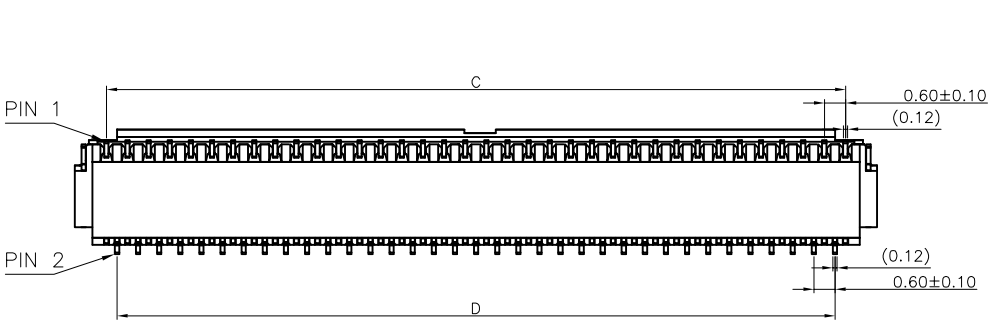

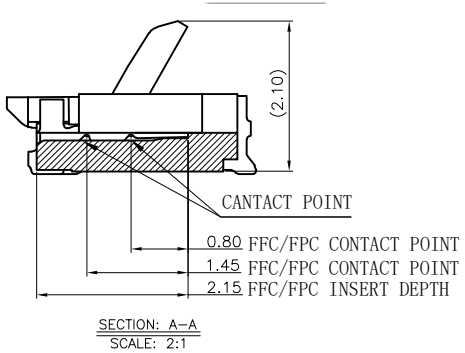


SECTION: A–A
SCALE: 2:1


Pin Number	Part Number	DIM A	DIM B	DIM C	DIM D	DIM E	DIM F
13	8.26A2.013200	5.40	4.23	3.60	3.00	4.90	4.20
15	8.26A2.015200	6.00	4.83	4.20	3.60	5.50	4.80
17	———	6.60	5.43	4.80	4.20	6.10	5.40
19	8.26A2.019200	7.20	6.03	5.40	4.80	6.70	6.00
21	8.26A2.021200	7.80	6.63	6.00	5.40	7.30	6.60
23	———	8.40	7.23	6.60	6.00	7.90	7.20
25	8.26A2.025200	9.00	7.83	7.20	6.60	8.50	7.80
27	8.26A2.027200	9.60	8.43	7.80	7.20	9.10	8.40
29	———	10.20	9.03	8.40	7.80	9.70	9.00
31	8.26A2.031200	10.80	9.63	9.00	8.40	10.30	9.60
33	———	11.40	10.23	9.60	9.00	10.90	10.20
35	8.26A2.035200	12.00	10.83	10.20	9.60	11.50	10.80
37	———	12.60	11.43	10.80	10.20	12.10	11.40
39	8.26A2.039200	13.20	12.03	11.40	10.80	12.70	12.00
41	———	13.80	12.63	12.00	11.40	13.30	12.60
45	8.26A2.045200	15.00	13.83	13.20	12.60	14.50	13.80
51	8.26A2.051200	16.80	15.63	15.00	14.40	16.30	15.60
57	8.26A2.057200	18.60	17.43	16.80	16.20	18.10	17.40
61	8.26A2.061200	19.80	18.63	18.00	17.40	19.30	18.60
71	———	22.80	21.63	21.00	20.40	22.30	21.60

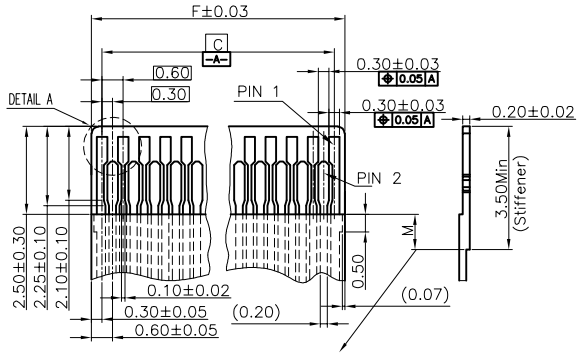

Dimension M must be 0.5mm minimum when the stiffener than 3.50mm

RECOMMENDED FPC



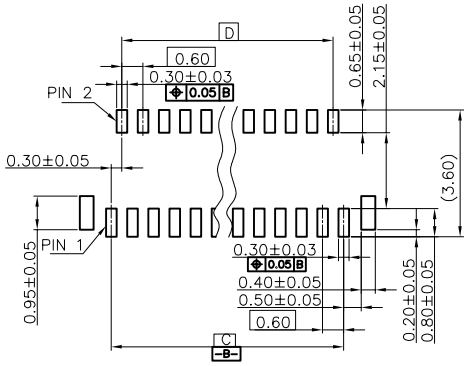

RECOMMENDED PCB LAYOUT

NO.	COMPONENTS	MATERIALS	FINISH/COLOR SPECIFICATION	QUANTITY
5	STATOR	PHOSPHOR BRONZE	Sn	2 POSITIONS
4	TERMINAL II	PHOSPHOR BRONZE	———	
3	TERMINAL I	PHOSPHOR BRONZE	———	POSITIONS
2	COVER	THERMOPLASTIC UL94V-0	BLACK	1
1	HOUSING	THERMOPLASTIC UL94V-0	BLACK	1

MARK	DESCRIPTION	DATE	REVISED	APPROVED
ΔX				
ΔX				
ΔX				

REVISIONS

UNSPECIFIED TOLERANCES	
ANGLAR	±5°
L≤ 4	±0.2
4<L≤ 16	±0.3
16<L≤ 63	±0.4
L> 63	±0.5


www.hiemi.cn

DSND		SCALE: N/A	0.3MM FFC/FPC SWING COVER CONNECTOR(H=1.1mm)
DWN		VIEW:	PART NO.: 8.26A2.***200
CHKD		UNIT: mm/in	DWG NO.:
APPD		SIZE: A4	


HIEMI TECHNOLOGY CO., LTD


WEIGHT	SHEET	REVISION
	1/1	A0

RoHS

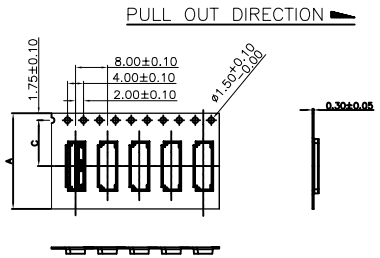

9~45PIN REEL

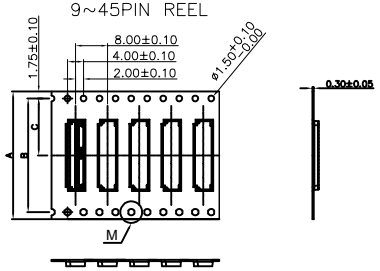






47~71PIN REEL


NOTES:

1. MATERIAL:
   1.1 CARRY TAPE:HIPS,T=0.30±0.05mm,CLEAR
   1.2 REEL:HIPS,
   1.3 SHIM:PE,CLEAR.
2. PRIMARY PACKING:3000PCS/REEL.
3. SECONDARY PACKING:SEE PACKING LIST
4. PEELING RESISTANCE: 0.1~1.3N(10~130gf); PEELING ANGLE: 165°~180°; PEELING SPEED: 300mm/minutes.

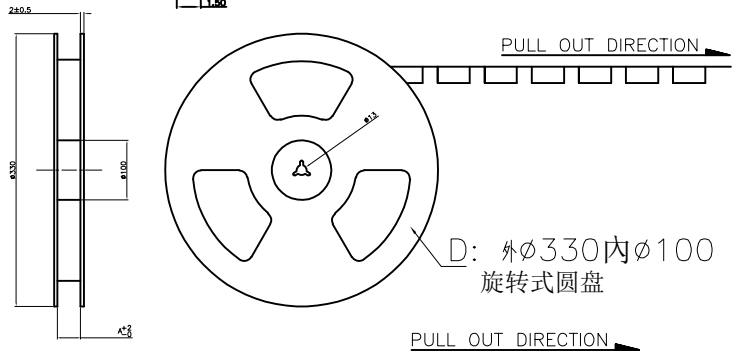

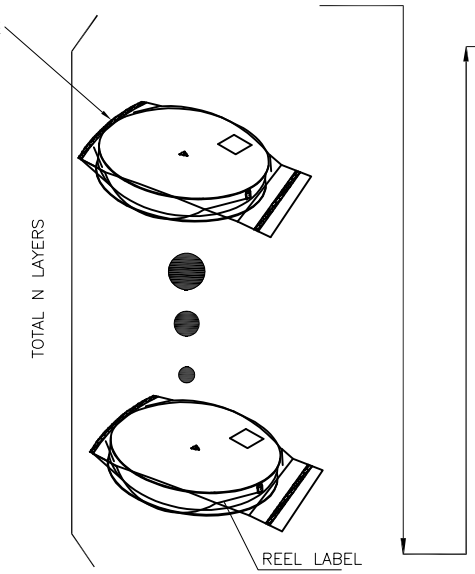

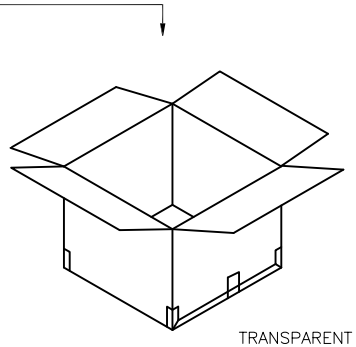

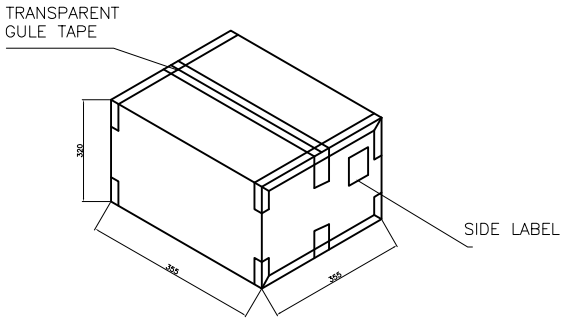

6. QTY. LIST:

NO. OF POS.	A	B	C	PCS/REEL
9~19 PIN	16.0	\	7.5	3000
21~45 PIN	24.0	\	11.5	3000
47~61 PIN	32.0	28.4	14.2	3000
71 PIN	44.0	40.4	20.2	3000

MARK	DESCRIPTION	DATE	REVISED	APPROVED
ΔX				
ΔX				
ΔX				

REVISIONS

www.hiemi.cn

ANGLAR	±5°
L≤ 4	±0.2
4<L≤ 16	±0.3
16<L≤ 63	±0.4
L> 63	±0.5

UNSPECIFIED TOLERANCES

HIEMI TECHNOLOGY CO., LTD

DSND		SCALE: N/A	0.3mm FFC/FPC DUAL CONTACT SIDE CONNECTOR(H=0.9mm)PACKAGE SPEC
DWN		VIEW:	PART NO.: 8.26A*.***200
CHKD		UNIT: mm/in	DWG NO.:
APPD		SIZE: A4	

WEIGHT	SHEET	REVISION
	1/1	A0