

RoHS

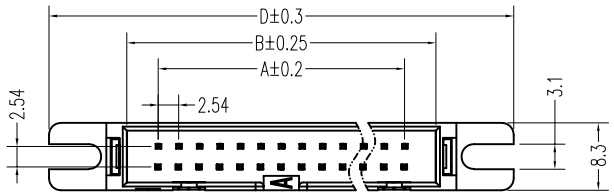


20P~64P有槽

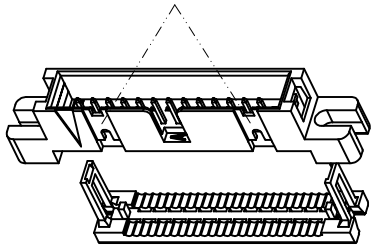



Material:
Insulator: PBT+30% Glass Fiber (UL94V-0).
Contact: Copper Alloy.
Contact Plated: Gold or Tin over Nickel Plated.


Specification:
Current Rating: 1 Amp.
Withstanding Voltage: AC 500V for 1 Minute.
Insulation Resistance: 1000MΩ Min. at DC 500V.
Contact Resistance: 15mΩ Max.
Operating Temperature: -40°C ~ +105°C.

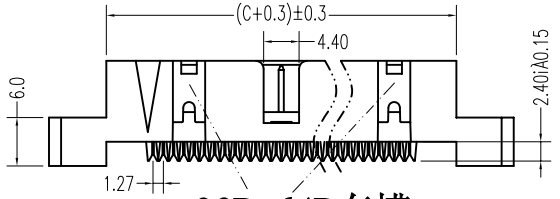

20P~64P有槽



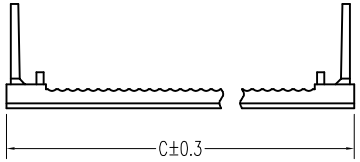




保持力大于0.5kg/P


5041-XXX0A5BNX0 R10

PIN数
1:不扣盖 2:扣盖
A:PBT防火
5:灰A
B:青铜
N:镍
1:G/F 5:G/15u"
2:G/1u" 6:G/30u"
3:G/3u"
4:G/5u"
1:盘装
R:RoHS
S:SONY

	Dim. A	Dim. B	Dim. C	Dim. D		Dim. A	Dim. B	Dim. C	Dim. D
10	10.16	17.96	22.70	37.20	30	35.56	43.36	48.10	62.60
14	15.24	23.04	27.78	42.28	34	40.64	48.44	53.18	67.68
16	17.78	25.58	30.32	44.82	40	48.26	56.06	60.80	75.30
20	22.86	30.66	35.40	49.90	50	60.96	68.76	73.50	88.00
24	27.94	35.74	40.48	54.98	60	73.66	81.46	86.20	100.70
26	30.48	38.28	43.02	57.52	64	78.74	86.54	91.28	105.78

10P/14P/16P无槽



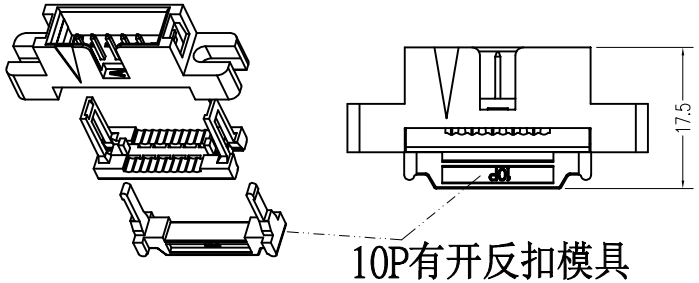

10P有开反扣模具

					ANGLAR	±5°
ΔX					L≤ 4	±0.2
ΔX					4<L≤ 16	±0.3
ΔX					16<L≤ 63	±0.4
MARK	DESCRIPTION	DATE	REVISED	APPROVED	L> 63	±0.5
REVISIONS					UNSPECIFIED TOLERANCES	

www.hiemi.cn

DSND		SCALE: N/A	5041SERIES BF-P-XXH(2)有耳 PBT 青铜
DWN		VIEW:	PART NO.: 5041-01
CHKD		UNIT: mm/in	DWG NO.:
APPD		SIZE: A4	

HIEMI TECHNOLOGY CO., LTD

WEIGHT	SHEET	REVISION
	1/1	A0