


RoHS

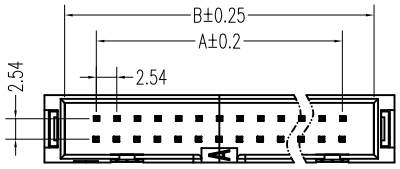



20P~64P有槽




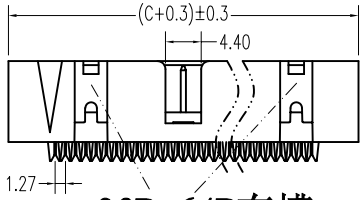

20P~64P有槽



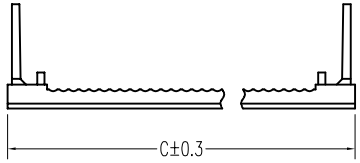



Material:
Insulator: PBT+30% Glass Fiber (UL94V-0).
Contact: Copper Alloy.
Contact Plated: Gold or Tin over Nickel Plated.


Specification:
Current Rating: 1 Amp.
Withstanding Voltage: AC 500V for 1 Minute.
Insulation Resistance: 1000MΩ Min. at DC 500V.
Contact Resistance: 15mΩ Max.
Operating Temperature: -40°C ~ +105°C.


5040-XX10A6BNX0 R10

- PIN数
- 1:附盖 2:扣盖
- A:PBT防火
- 6:灰G
- B:青铜
- N:镍
- 1:G/F 2:G/1u" 3:G/3u" 4:G/5u" 5:G/15u" 6:G/30u"
- R:RoHS S:SONY
- 1:盘装

	Dim. A	Dim. B	Dim. C			Dim. A	Dim. B	Dim. C	
10	10.16	17.96	22.70		30	35.56	43.36	48.10	
14	15.24	23.04	27.78		34	40.64	48.44	53.18	
16	17.78	25.58	30.32		40	48.26	56.06	60.80	
20	22.86	30.66	35.40		50	60.96	68.76	73.50	
24	27.94	35.74	40.48		60	73.66	81.46	86.20	
26	30.48	38.28	43.02		64	78.74	86.54	91.28	

10P/14P/16P无槽



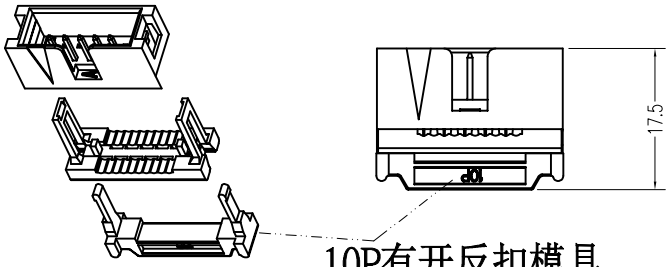

10P有开反扣模具

MARK	DESCRIPTION	DATE	REVISED	APPROVED
ΔX				
ΔX				
ΔX				

REVISIONS

UNSPECIFIED TOLERANCES	
ANGLAR	±5°
L≤ 4	±0.2
4<L≤ 16	±0.3
16<L≤ 63	±0.4
L> 63	±0.5

www.hiemi.cn

HIEMI TECHNOLOGY CO., LTD

DSND		SCALE: N/A	5040SERIES BF-N-XXH(2) PBT 青铜
DWN		VIEW:	PART NO.: 5040-01
CHKD		UNIT: mm/in	DWG NO.:
APPD		SIZE: A4	

WEIGHT	SHEET	REVISION
	1/1	A0