
RoHS

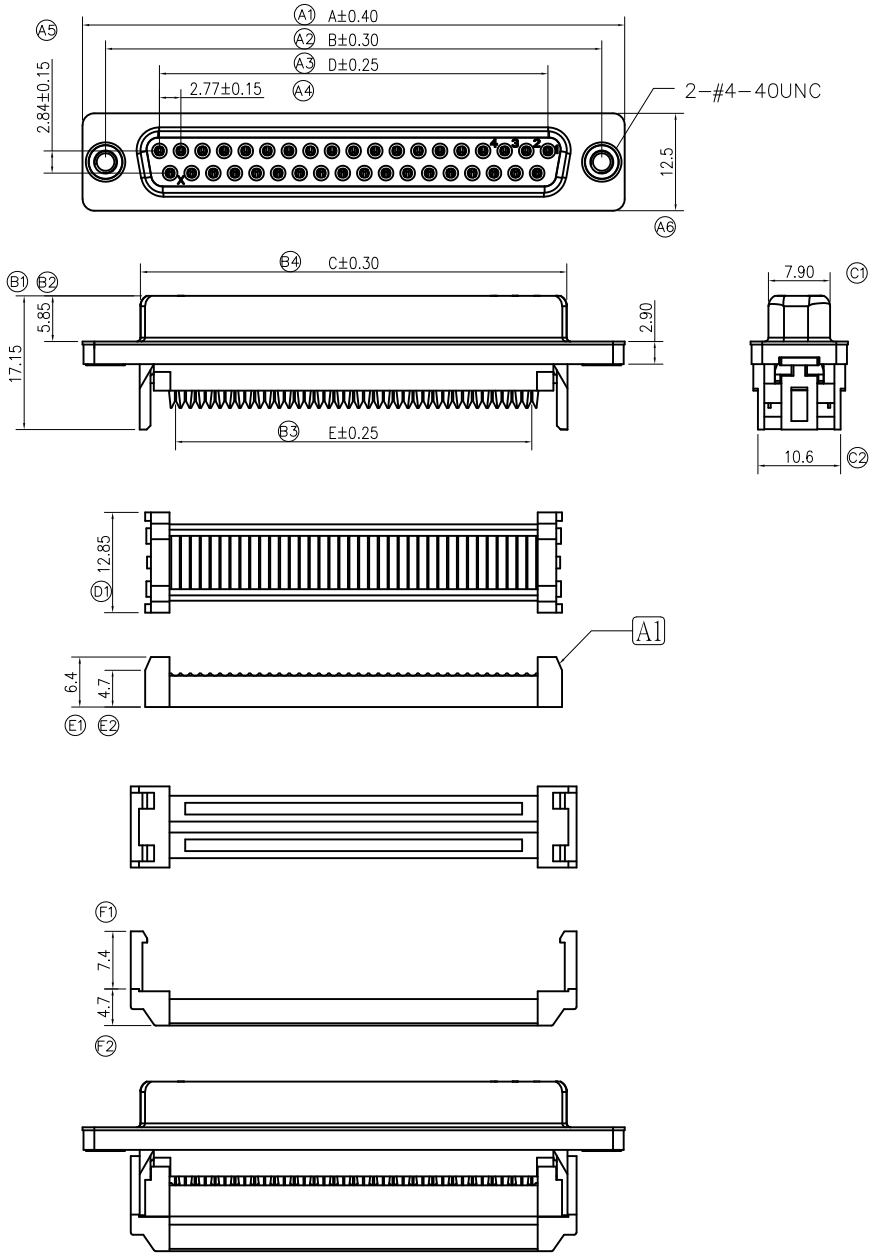

MATERIAL&FINISH

Insulator: PBT Glass Fiber(UL94V-0)

Contact Material: Terminal Brass.
Shell Spcc.
Rivet Copper Alloy.

Contact Plating : Terminal Gold-Plated Over Nickel.
Shell Nickel OR TIN.
Rivet Nickel.

SPECIFICATIONS

Current Rating :1A AC,DC

Voltage Rating : 250V AC,DC

Temperature Range:-40°C To+105°C

Contact Resistance:20mΩ Max

Insulation Resistance:1000MΩ Min

Withstanding Voltage:500V AC/Min

3120-XX2FXXXXXX R11

PIN数						1:附螺丝(4.8*11.8铁) 2:附螺丝(5.8*12.8铁)	
						1:盘装 R:RoHS	
1:附盖	2:扣盖					1:锡壳 2:镍壳	3:镍壳(48H)
F:母	M:公					1:G/F 2:G/1u" 3:G/3u" 4:G/5u"	5:G/15u" 6:G/30u"
A:PBT防火	E:PA66防火						
1:黑色	2:蓝色						
B:青铜	P:磷铜					N:镍	G:全金

NUMBER OF POSITIONS	DIMENSION				
	A	B	C	D	E
09	30.80	25.00	16.35	11.08	10.16
15	39.14	33.30	24.75	19.39	17.78
25	53.05	47.04	38.35	33.24	30.48
37	69.32	63.50	54.75	49.86	45.72

MARK	DESCRIPTION	DATE	REVISED	APPROVED
ΔX				
ΔX				
ΔX				

REVISIONS

UNSPECIFIED TOLERANCES	
ANGLAR	±5°
L≤ 4	±0.2
4<L≤ 16	±0.3
16<L≤ 63	±0.4
L> 63	±0.5

www.hiemi.cn

HIEMI TECHNOLOGY CO., LTD

DSND		SCALE: N/A	3120 SERIES D-SUB-XXF(3)-外扣压排式(长胶)
DWN		VIEW:	PART NO.: 3120-01-02
CHKD		UNIT: mm/in	DWG NO.:
APPD		SIZE: A4	

WEIGHT	SHEET	REVISION
	1/1	A0