
RoHS

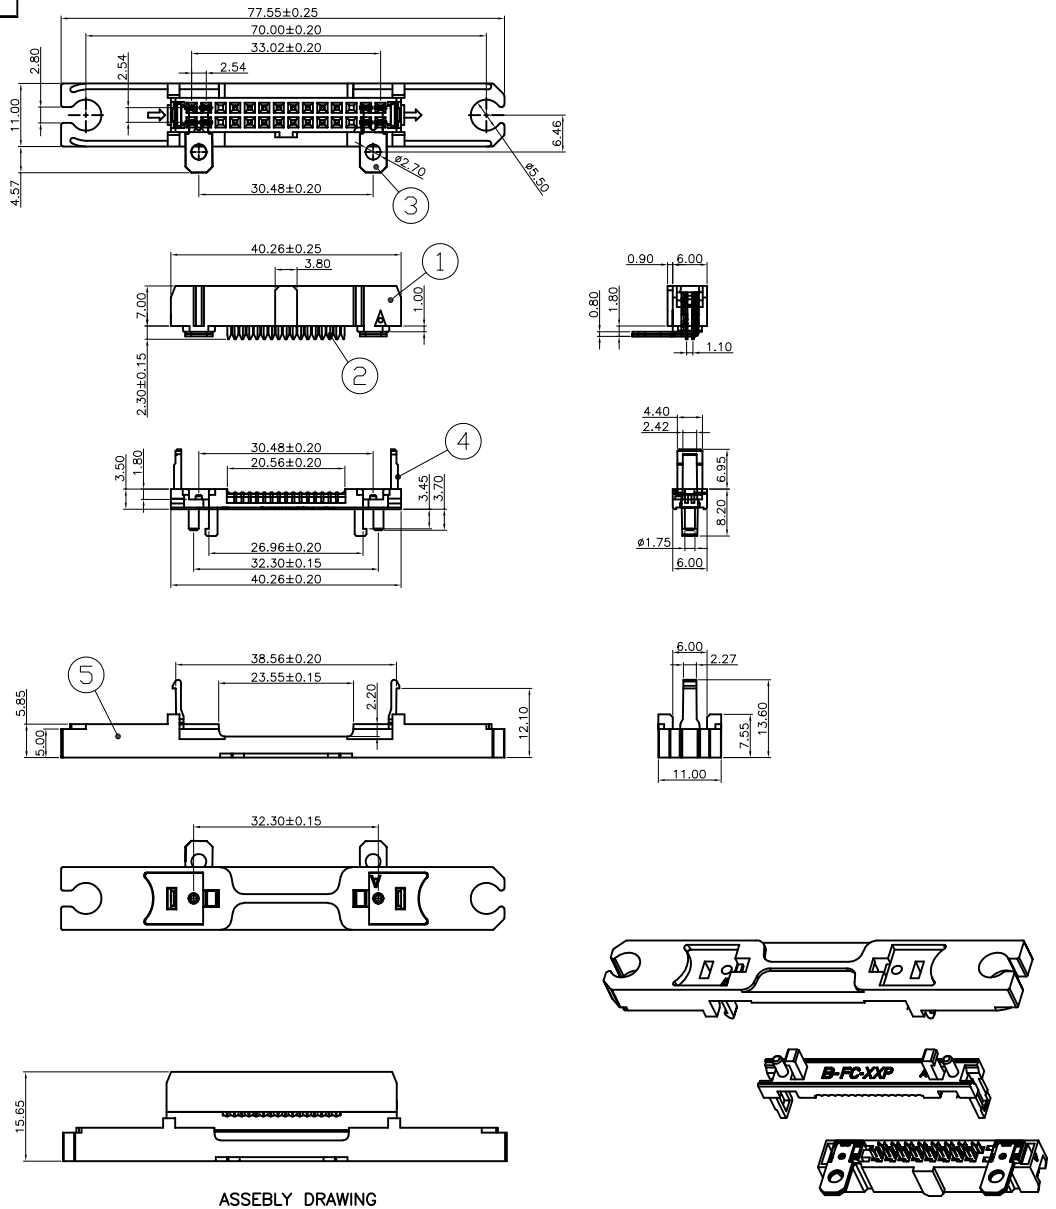

ASSEBLY DRAWING

MATERIAL&FINISH

Insulator Material: PBT, UL 94V-0
Contact Plating: Gold flash over nickel
Contact Material: Brass

Current Rating : 1A AC,DC
Contact Resistance: 20mΩ Max.
Dielectric Withstanding: AC 500V
Insulator Resistance: 1000MΩ Min.
Operating Temp.: -20°C~+105°C

1015-281XAXBXXX X10

PIN数		
1:附盖	2:扣 盖	
1:大鼻 有槽	3:小鼻 有槽	
5:小鼻 无槽	6:大鼻 无槽	
A:PBT防火		
1:黑	6:灰G	
B:青铜	P:磷铜	
0:常规	1:低拉力	
1:G/F	5:G/15u"	
2:G/1u"	6:G/30u"	
3:G/3u"	N:全镍	
4:G/5u"		
N:镍	G:全金	
1:盘装		
R:RoHS		
S:SONY		
H:Halogen Free		

NO.	NAME	MATERIAL	FINISH	Q'TY
1	HOUSING	PBT+GF(UL94V-0)	BLACK	1
2	TERMINAL	BRASS T=0.3	GOLE PLATED OVER NICKEL	PINS
3	TERMINAL	BRASS T=0.4	GOLE PLATED OVER NICKEL	PINS
4	COVER	PBT+GF(UL94V-0)	BLACK	1
5	STENT	PBT+GF(UL94V-0)	BLACK	1

MARK	DESCRIPTION	DATE	REVISED	APPROVED
ΔX				
ΔX				
ΔX				

REVISIONS

UNSPECIFIED TOLERANCES	
ANGLAR	±5°
L≤ 4	±0.2
4<L≤ 16	±0.3
16<L≤ 63	±0.4
L> 63	±0.5

www.hiemi.cn

HIEMI TECHNOLOGY CO., LTD

DSND		SCALE: N/A
DWN		VIEW:
CHKD		UNIT: mm/in
APPD		SIZE: A4

1015 SERIES
BFC(2.54DC)-28H(2) PBT
PART NO.: 1015-01
DWG NO.:

WEIGHT	SHEET	REVISION
	1/1	A0