
RoHS

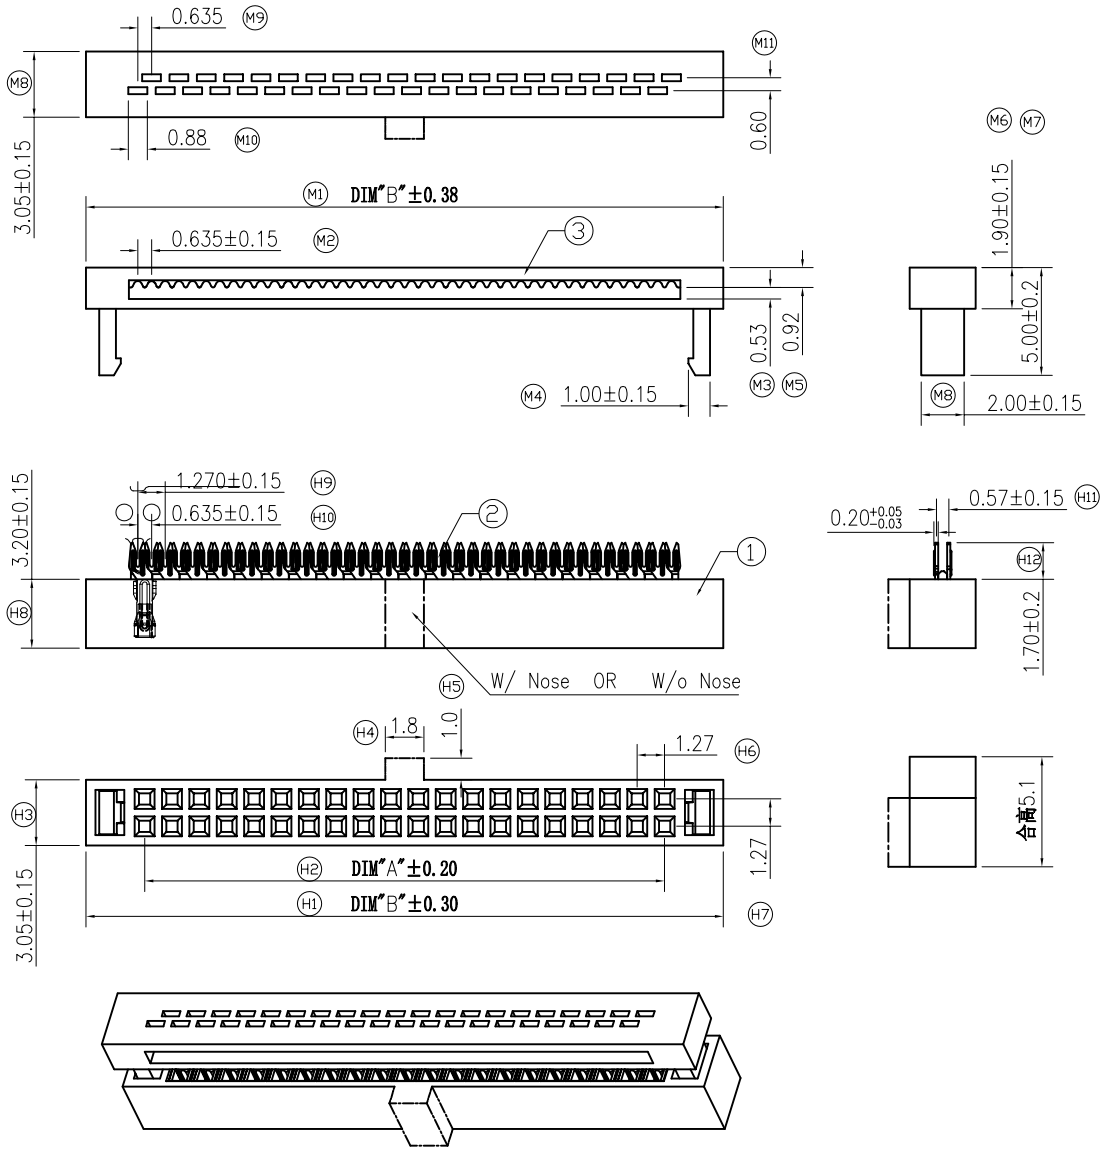

Specification:
Contact Resistance:20m Ohm Max.
Insulation Resistance:100M Ohm Min.
Current Rating:1A AC,DC.
Voltage Rating:250V AC,DC.
Withstanding Voltage:500V AC Min.
Temperature Range:-40°C TO 105°C

I.D.C CONNECTOR PITCH 1.27*1.27

1210-XXXXA1PG2X X10

- PIN数
- 1:附盖 2:扣 盖
- 1:有鼻 2:无鼻
- A:PBT防火
- 1:黑
- P:磷铜
- 1:低拉力 2:中拉力 3:高拉力
- 1:G/F 2:1u" W:全金2u",接触区30u"
- G:全金
- 1:盘装 R:RoHS S:SONY H:Halogen Free

NUMBER OF POSITIONS	DIMENSION A	DIMENSION B	NUMBER OF POSITIONS	DIMENSION A	DIMENSION B	NUMBER OF POSITIONS	DIMENSION A	DIMENSION B
06	2.54	8.00	24	13.97	19.43	50	30.48	35.94
08	3.81	9.27	26	15.24	20.70	60	36.83	42.29
10	5.08	10.54	30	17.78	23.24	64	39.37	44.83
12	6.35	11.81	32	19.05	24.51	68	41.91	47.37
14	7.62	13.08	34	20.32	25.78	70	43.18	48.64
16	8.89	14.35	36	21.59	27.05	74	45.72	51.18
18	10.16	15.62	40	24.13	29.59	76	46.99	52.45
20	11.43	16.89	44	26.67	32.13	80	49.53	54.99

MARK	DESCRIPTION	DATE	REVISED	APPROVED
ΔX				
ΔX				
ΔX				

REVISIONS

UNSPECIFIED TOLERANCES	
ANGLAR	±5°
L≤ 4	±0.2
4<L≤ 16	±0.3
16<L≤ 63	±0.4
L> 63	±0.5

www.hiemi.cn

DSND		SCALE: N/A
DWN		VIEW:
CHKD		UNIT: mm/in
APPD		SIZE: A4

HIEMI TECHNOLOGY CO., LTD

1210 SERIES
1.27IDC-XX(N)H(2)PBT黑 磷铜全金
PART NO.: 1210-01-0
DWG NO.:

WEIGHT	SHEET	REVISION
	1/1	A0