
RoHS

Specification:
Contact Resistance:20m Ohm Max.
Insulation Resistance:100M Ohm Min.
Current Rating:1A AC,DC.
Voltage Rating:250V AC,DC.
Withstanding Voltage:500V AC Min.
Temperature Range:-40°C TO 105°C

I.D.C CONNECTOR PITCH 1.27*1.27

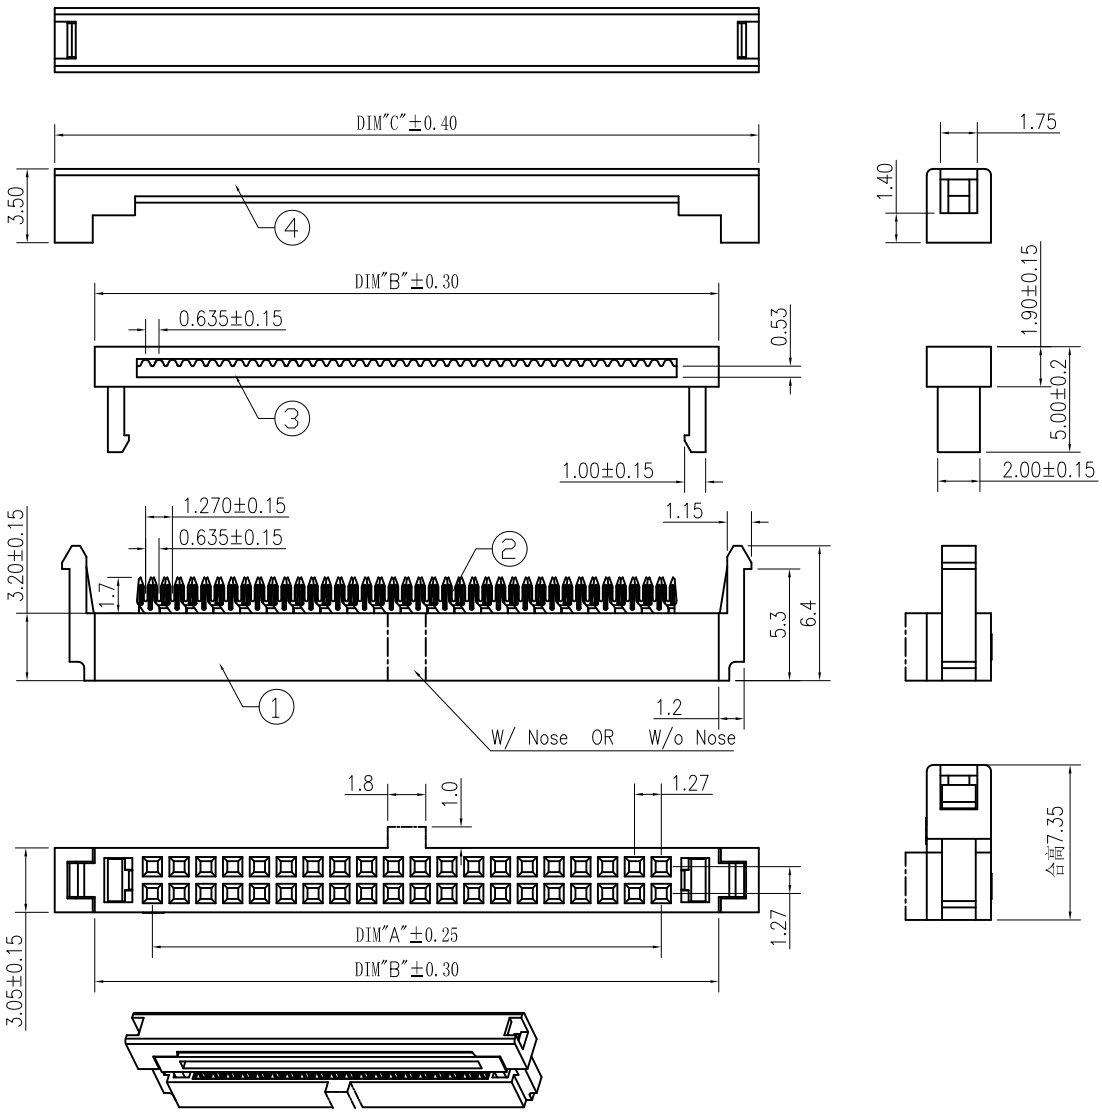


1220.0611A1PG23.R10

1220-XXXXA1PG2X X10

- PIN数
- 1:附盖 2:扣 盖
- 1:有鼻 2:无鼻
- A:PBT防火
- 1:黑
- P:磷铜
- 1:盘装
- R:RoHS S:SONY H:Halogen Free
- 1:低拉力 2:中拉力 3:高拉力
- 1:G/F 2:1u" W:全金2u",接触区30u"
- G:全金

| NUMBER OF POSITIONS | DIMENSION A | B | C | NUMBER OF POSITIONS | DIMENSION A | B | C | NUMBER OF POSITIONS | DIMENSION A | B | C |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 06 | 2.54 | 8.00 | 11.80 | 26 | 15.24 | 20.70 | 24.50 | 60 | 36.83 | 42.29 | 46.09 |
| 08 | 3.81 | 9.27 | 13.07 | 30 | 17.78 | 23.24 | 28.31 | 64 | 39.37 | 44.83 | 48.63 |
| 10 | 5.08 | 10.54 | 14.34 | 32 | 19.05 | 24.51 | 27.04 | 66 | 40.64 | 46.10 | 49.90 |
| 12 | 6.35 | 11.81 | 15.61 | 34 | 20.32 | 25.78 | 29.58 | 68 | 41.91 | 47.37 | 51.17 |
| 14 | 7.62 | 13.08 | 16.88 | 36 | 21.59 | 27.05 | 30.85 | 70 | 43.18 | 48.64 | 52.44 |
| 16 | 8.89 | 14.35 | 18.15 | 40 | 24.13 | 29.59 | 33.39 | 74 | 45.72 | 51.18 | 54.98 |
| 20 | 11.43 | 16.89 | 20.69 | 44 | 26.67 | 32.13 | 35.93 | 76 | 46.99 | 52.45 | 56.25 |
| 24 | 13.97 | 19.43 | 23.23 | 50 | 30.48 | 35.94 | 39.74 | 80 | 49.53 | 54.99 | 58.79 |

| MARK | DESCRIPTION | DATE | REVISED | APPROVED |
|---|---|---|---|---|
| | | | | |
| ΔX | | | | |
| ΔX | | | | |
| ΔX | | | | |

REVISIONS

| UNSPECIFIED TOLERANCES | |
|---|---|
| ANGLAR | ±5° |
| L≤ 4 | ±0.2 |
| 4<L≤ 16 | ±0.3 |
| 16<L≤ 63 | ±0.4 |
| L> 63 | ±0.5 |

www.hiemi.cn

HIEMI TECHNOLOGY CO., LTD

| | | | |
|---|---|---|---|
| DSND | | SCALE: N/A | 1220 SERIES |
| DWN | | VIEW: | 1.27IDC-XX(N)H(3)PBT黑 磷铜全金 +反扣 |
| CHKD | | UNIT: mm/in | PART NO.: |
| APPD | | SIZE: A4 | DWG NO.: |

| WEIGHT | SHEET | REVISION |
|---|---|---|
| | 1/1 | A0 |