
RoHS

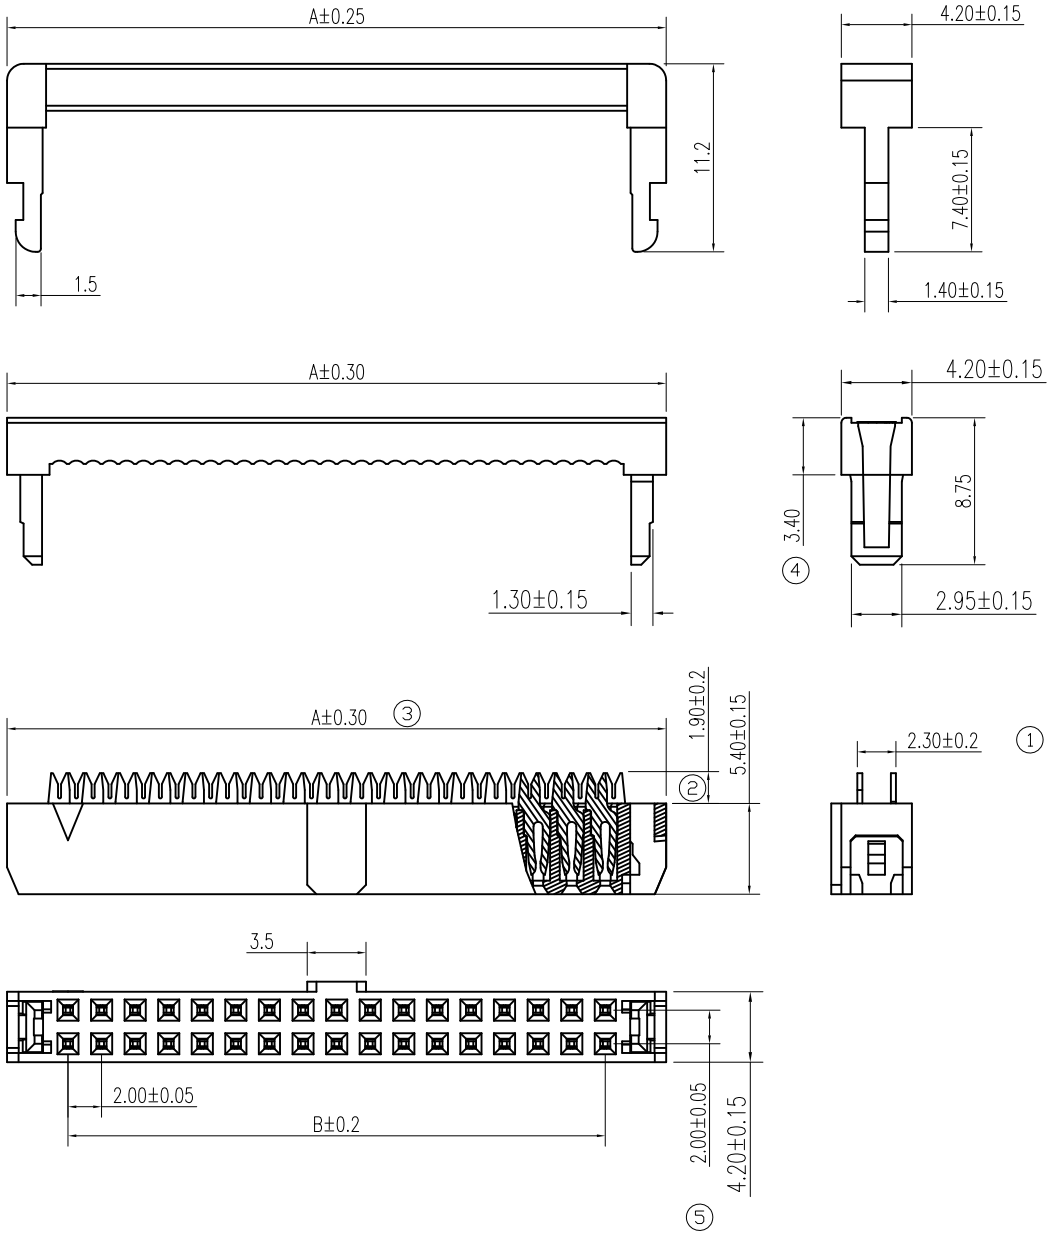

MATERIAL&FINISH

Insulator: PBT Glass Fiber(UL94V-0)(UL E107536)

Contact : Brass OR Phosphor bronze
Contact : Gold-Plated Over Nickel.

SPECIFICATIONS

Current Rating : 1A AC,DC
Voltage Rating : 250V AC,DC
Temperature Range: -40°C To+105°C
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 500V AC/Min

NUMBER OF POSITIONS	DIMENSION		NUMBER OF POSITIONS	DIMENSION		NUMBER OF POSITIONS	DIMENSION	
	A	B		A	B		A	B
06	11.2	4.0	20	25.2	18.0	36	41.2	34.0
08	13.2	6.0	22	27.2	20.0	40	45.2	38.0
10	15.2	8.0	24	29.2	22.0	44	49.2	42.0
12	17.2	10.0	26	31.2	24.0	50	55.2	48.0
14	19.2	12.0	28	33.2	26.0	60	65.2	58.0
16	21.2	14.0	30	35.2	28.0			
18	23.2	16.0	34	39.2	32.0			

MARK	DESCRIPTION	DATE	REVISED	APPROVED
ΔX				
ΔX				
ΔX				

REVISIONS

UNSPECIFIED TOLERANCES	
ANGLAR	±5°
L≤ 4	±0.2
4<L≤ 16	±0.3
16<L≤ 63	±0.4
L> 63	±0.5

www.hiemi.cn

HIEMI TECHNOLOGY CO., LTD

DSND		SCALE: N/A
DWN		VIEW:
CHKD		UNIT: mm/in
APPD		SIZE: A4

1120SERIES
MFY(2.0IDC Y端)-XXH(3) + 反扣
PART NO.: 1120-02-1
DWG NO.:

WEIGHT	SHEET	REVISION
	1/1	A0