




RoHS

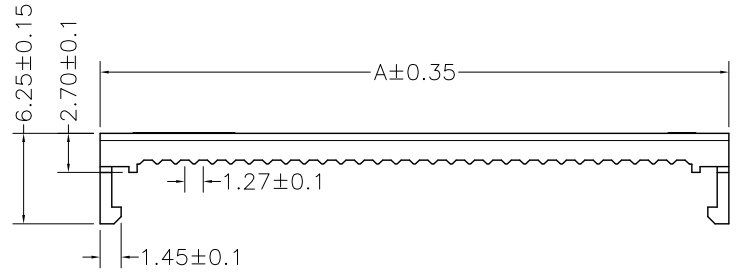





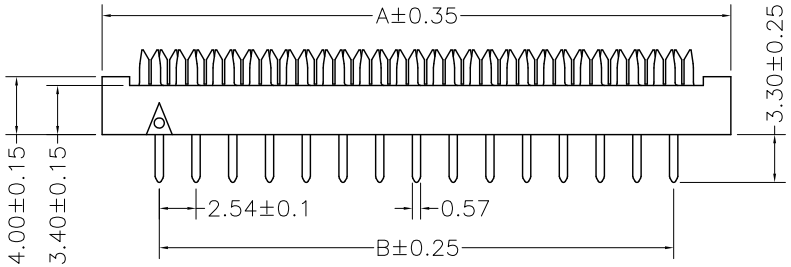







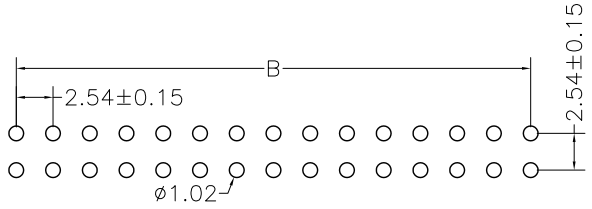

MATERIAL&FINISH
Insulator: PBT Glass Fiber(UL94V-0)
Contact : Brass
Contact : Gold-Plated Over Nickel.

ELECTRICAL CHARACTERISTICS:
Current Rating: 1 Amp
Contact Resistance: 20MΩ Max
Withstanding Voltage: 500V AC/Min
Insulation Resistance: 1000MΩ Min
Temperature Range: -40° C To+105° C

PART NO	Dim. A	Dim. B
FD-06P	12.98	5.08
FD-08P	15.52	7.62
FD-10P	18.06	10.16
FD-12P	20.60	12.70
FD-14P	23.14	15.24
FD-16P	25.68	17.78
FD-18P	28.22	20.32
FD-20P	30.76	22.86
FD-22P	33.30	25.40
FD-24P	35.84	27.94
FD-26P	38.38	30.48
FD-30P	43.46	35.56
FD-34P	48.54	40.64
FD-40P	56.16	48.26
FD-44P	61.24	53.34
FD-50P	68.86	60.96
FD-60P	81.56	73.66
FD-64P	86.64	78.74

MARK	DESCRIPTION	DATE	REVISED	APPROVED
ΔX				
ΔX				
ΔX				

REVISIONS

UNSPECIFIED TOLERANCES	
ANGLAR	±5°
L≤ 4	±0.2
4<L≤ 16	±0.3
16<L≤ 63	±0.4
L> 63	±0.5

www.hiemi.cn

HIEMI TECHNOLOGY CO., LTD

DSND		SCALE: N/A	DIP-2.54(合高6.3mm)
DWN		VIEW:	PART NO.:
CHKD		UNIT: mm/in	DWG NO.:
APPD		SIZE: A4	

WEIGHT	SHEET	REVISION
	1/1	A0