


RoHS

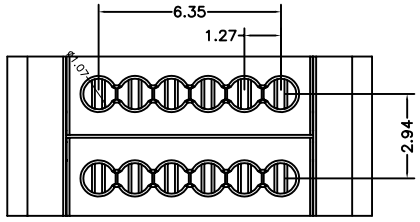

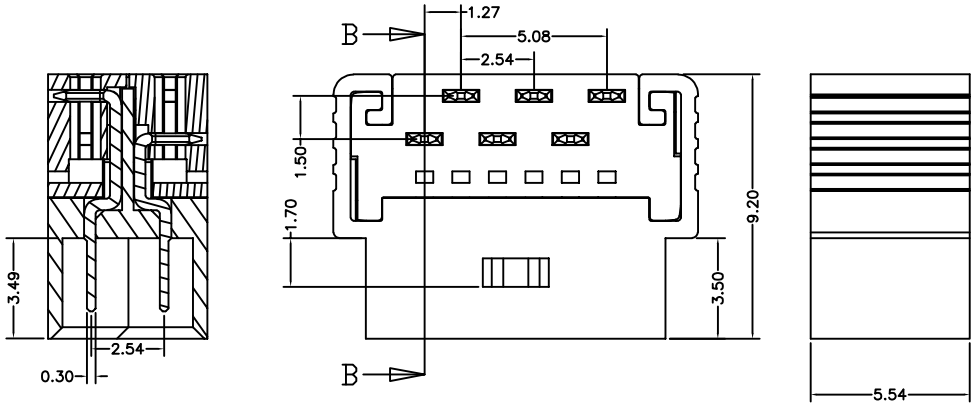

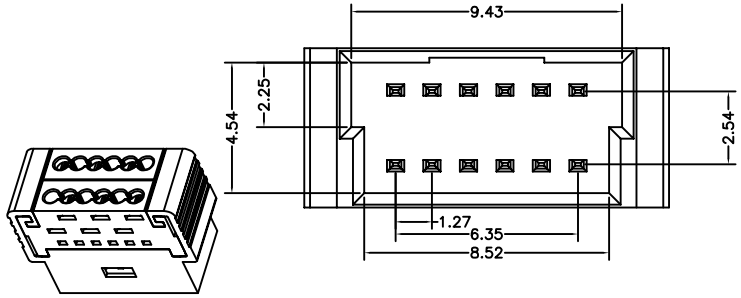

Specification:
Contact Resistance:20m Ohm Max.
Insulation Resistance:100M Ohm Min.
Current Rating:AC,DC.2.5A/Pin with AWG26 wire
Voltage Rating:250V AC,DC.
Withstanding Voltage:500V AC Min.
Temperature Range:-40° C TO 105° C
Transimission Speed:500M/Pin
I.D.C CONNECTOR PITCH 1.27*2.54

NO.	NAME	MATERIAL	FINISH	Q'TY
1	HOUSING	LCP (UL94V-0)	BLACK	1
2	TERMINAL	PHOSPHOR BRONZE 0.4	GOLD PLATED OVER NICKEL	PINS
3	COVER	LCP (UL94V-0)	BLACK	2

MARK	DESCRIPTION	DATE	REVISED	APPROVED
ΔX				
ΔX				
ΔX				

REVISIONS

UNSPECIFIED TOLERANCES	
ANGLAR	±5°
L≤ 4	±0.2
4<L≤ 16	±0.3
16<L≤ 63	±0.4
L> 63	±0.5

www.hiemi.cn

DSND		SCALE: N/A	1.27*2.54 (2C)
DWN		VIEW:	PART NO.:
CHKD		UNIT: mm/in	DWG NO.:
APPD		SIZE: A4	

HIEMI TECHNOLOGY CO., LTD

WEIGHT	SHEET	REVISION
	1/1	A0