
NOTES:


1.HUOSING: LCP HIGH-TEMP THERMOPLASTIC UL94V-0 COLOR:BLACK


2.TERMINAL:PHOSPHOR BRONZE
PLATING:GOLD FLASH IN CONTACT AREA/100μ''MIN. MATTE TIN
PLATE IN SOLDER AREA.OVERALL 50μ'' MIN. NICKEL.


3.CODING INFORMATION: B5XX-GxxP-BxR02


- 02: GROUND LUG
- PACKING: R: CARRIER REEL
- 0:WITH POSITIONING POSTS
  1:WITHOUT POSITIONING POSTS
- COLOR:BLACK
- PLUG
- PIN
- PLATING: G:GOLD FLASH
  Q:GOLD FLASH and TIN
- 0.8 BTB
- HEIGHT: 45--4.5H; 7.5--7.5H; 95--9.5H;
- BTB CONNECTOR SERIES

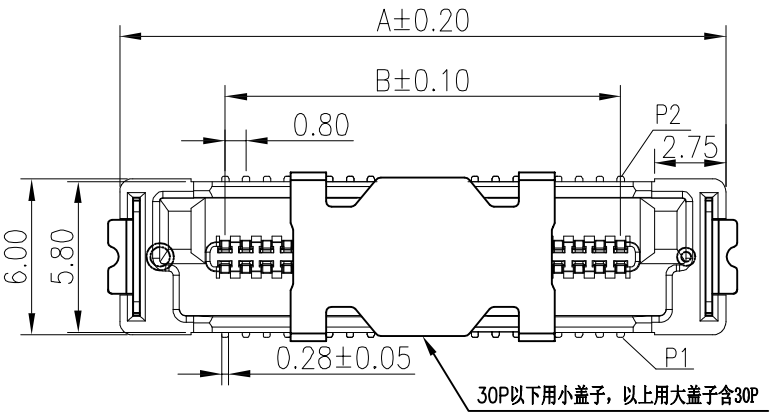



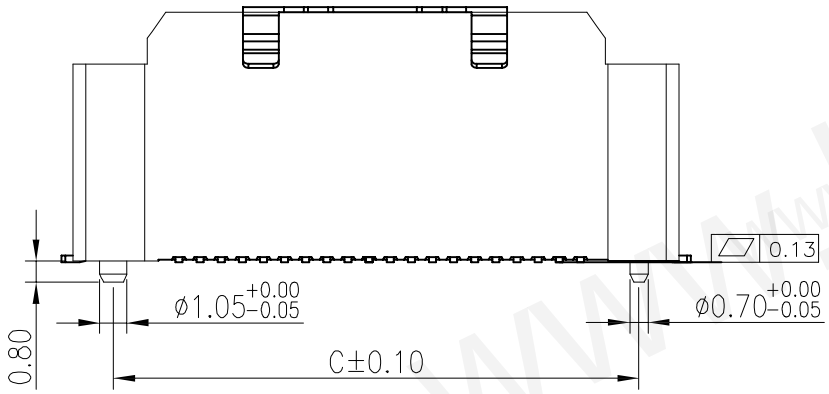

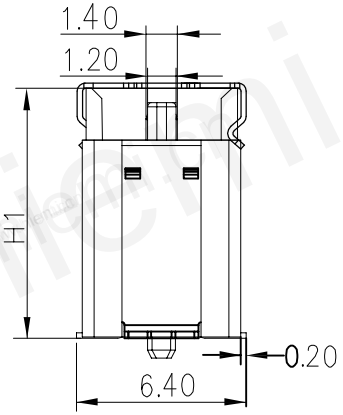

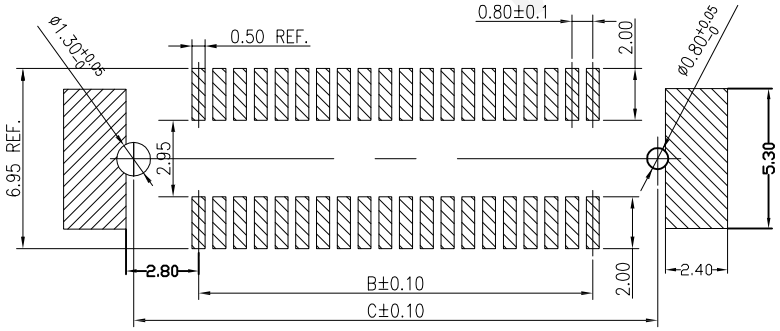

MATING HEIGHT	H1	H2
5.0	4.5	4.0
8.0	7.5	4.0
10	4.5	9.0
13	7.5	9.0
15	9.5	9.0

NO.of contacts	Dimensions		
	A.	B.	C.
10	11.3	3.2	8.2
16	13.7	5.6	10.4
20	15.3	7.2	12.2
30	19.3	11.2	16.2
40	23.3	15.2	20.2
50	27.3	19.2	24.2
60	31.3	23.2	28.2
70	35.3	27.2	32.2
80	39.3	31.2	36.2
100	47.3	39.2	44.2
120	55.3	47.2	52.2
140	63.3	55.2	60.2

修订 SER	修 改 摘 要 REVISION DESCRIPTION	签 名 SIGNATURE	日期 DATE

一般公差 GENERAL TOLERANCE
.X ±0.30
.XX ±0.20
.XXX ±0.10
ANGLES ±0° 30'

版本 (REV) A

骇米科技电子（深圳）有限公司
HIEMI Technology(SHENZHEN) Co., Ltd

制图 (DR): Kavin 2020.07.27	品名(TITLE): 0.80mm BTB PLUG		
审核 (CHKD):	料号 (PART NO): B5xx-GxxP-BxR02		
核准 (APPD): Tong 2020.07.27	比例(SCALE) 1:8	单位 (UNITS) mm	张数(SHEET) 1 OF 1	图幅 (SIZE) A4

www.hiemi.cn