RoHS

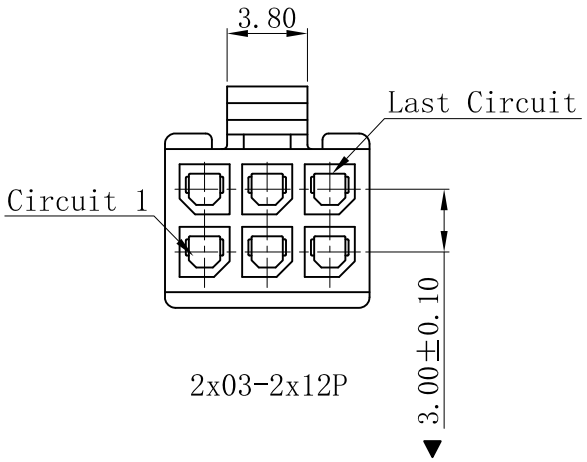

2x03-2x12P

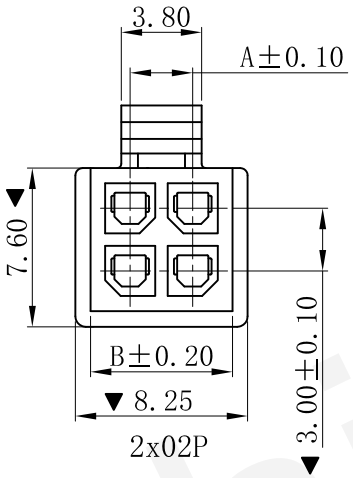

2x02P

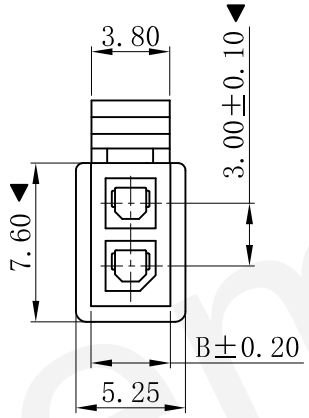

2x01P

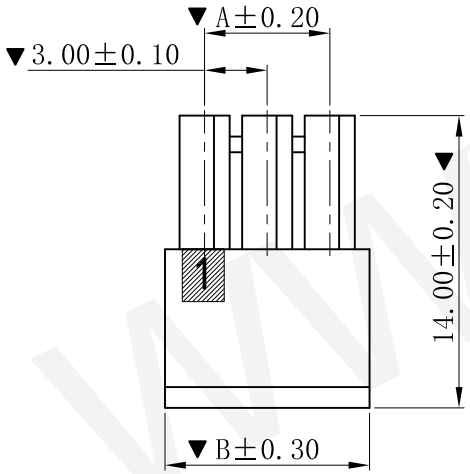

2x03-2x12P

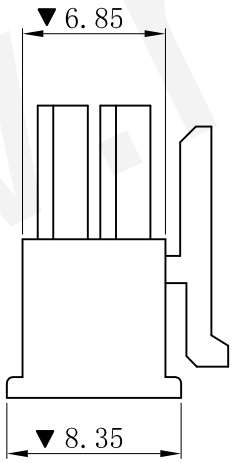

■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 5A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance:1000MΩ min
- Temperature range: -25° C~+85° C

■ HOUSING

- Part No.: H3025-2xNP-X
- Poles : 02-24P
- Housing Material: PA66 UL94V-2 Black
- The Dimension Marked "▼" Must Be Recorded

H3025-2xNP-X

None: PA66-V2 Black
V0: PA66-V0 Natural
V0BK: PA66-V0 Black



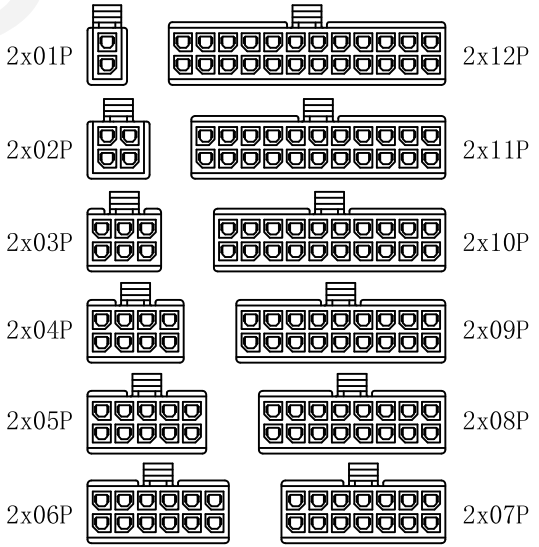

CIRCUIT SIZE LAYOUT

Poles	Dimensions(mm)	
	A	B
02	---	3.85
04	3.00	6.85
06	6.00	9.85
08	9.00	12.85
10	12.00	15.85
12	15.00	18.85
14	18.00	21.85
16	21.00	24.85
18	24.00	27.85
20	27.00	30.85
22	30.00	33.85
24	33.00	36.85

版次 REV.	说明 DESCRIPTION	日期 DATE.	承认 APPRO.
D	更新图面	2019-06-03	PH.Duan
C	修订版本	2015-11-04	陈雄军
B	变更图宽格式内容	2013-12-27	陈雄军
A	新版本	2011-05-24	陈雄军

一般公差 GENERAL TOLERANCE:	0±0.30 .0±0.25 .00±0.20 .000±0.05 ANGLE. ±1°
绘图/DR	PH.Duan
审核/CHECK	陈雄军
核准/APPRO	胡 进
日期/DATE	2019-06-03

骇米科技电子（深圳）有限公司
HIEMI Technology(SHENZHEN) Co., Ltd

投影法 Projection		品 名 (PART NEME)	Molex 3.00mm Male Housing Connector Series
单位 Unit	MM		
比例/Scale	1:1		
大小/SIZE	A4	料 号 (PART NO)	H3025-2xNP-X
页码/SHEET	1/1		状态码 C
版本/Rev	D		

www.hiemi.cn