


CUSTOMER DRAWING


REV. 版本	ECN NO. ECN编号	DATE 日期	DESCRIPTION 内容描述	APPROVED BY 核准
A0	——	2019/03/06	NEW RELEASE	APLIN

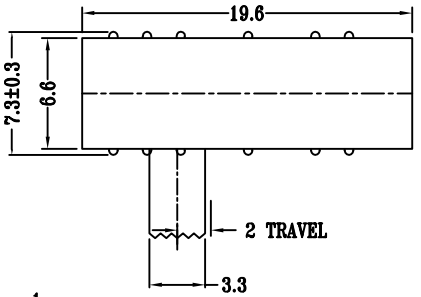



SCHEMATIC (SHORTING)

H25A	003	XX	X	X	X	X	X	X	X	X	X	XX
Series	Rating	Function	Terminal Type	Actuator Type	Actuator Height	Housing Type	Terminal Type	Package	Actuator Color	Housing Color		Suffix
	003 0.3A 30VAC	12	S Solder Terminal	A	3 3mm	N	T1	Z SMD	B Black	B Black		
		13	P PCB Teminal		4 4mm			Blank DIP	W White	W White		
		14		B	5 5mm	R	T2		R Red	R Red		
		...			... ...					BR Natural		
		22		C			T3					
		23		T 特殊柄			T4					
		24					T5					
		...										

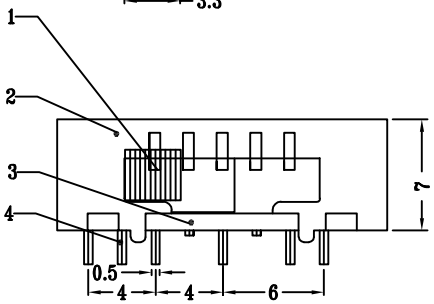



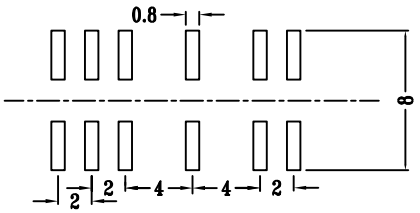

P.C.B LAYOUT
BOTTOM VIEW

规格 Specification:
型号 Model: H25A
额定值 Rating: 0.3A 30VDC
接触电阻 Contact resistance:≤50 mΩ
绝缘电阻 Insulation resistance:≥100 MΩ(DC500V/Min)
使用寿命 Operation life:＞10000 cycles(Unloading)
操作力 Operation force:300±150gf
所有材料符合Rohs要求 All meterials are Rohs compliant

佛山市皓通电子有限公司
FoShan Haoswitch Electronic Co.,Ltd.

DRAWN BY 制 图	YUAN	2019/03/06	SCALE 比 例	FREE	PRODUCT NAME 产品名称	Slide Switch
CHECKED BY 核 对	APLIN	2019/03/06	PAGE 页 面	1/1	DESCRIPTION 产品描述	
APPROVED BY 批 准	ZHANG	2019/03/06	UNIT 单 位	mm		
TOLERANCE 未标注公差	X: ±0.5 .X: ±0.3 .XX: ±0.2	X°: ±5° .X°: ±2°	PROJECTED 投影		PART NO. 物料编号	H25A-00325PC-8N1T1ZWBR-R-L3R2
					SIZE 尺寸 A4	DRAWN NO. 图纸编号 HTDW202301217-001

https://www.howswitch.com